


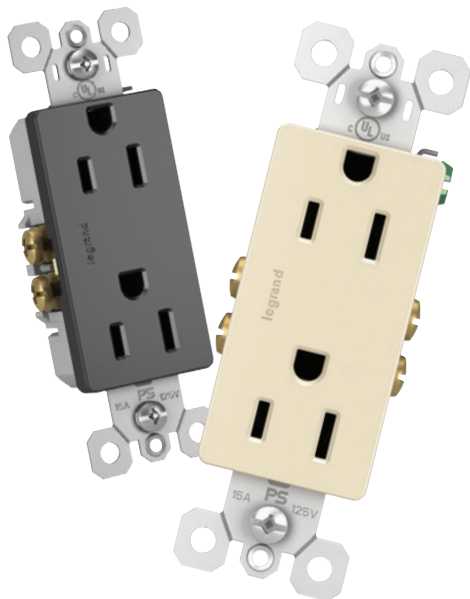

Same reliable receptacles,
now with a subtle new look.

885, 885S

Aesthetically improved yet reliable as ever, these receptacles are part of the radiant® collection – offering a better fit, form and finish. Ideal for residential, multi-dwelling and hospitality applications.

Features & Benefits

High-impact resistant thermoplastic construction.



Extra-long strap

885LA

- Part of the radiant® collection.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.

- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.

- Push wire accepts #14 AWG solid only.
- Low profile face.
- Self-grounding models provide automatic ground clip.

3rd Party Compliance



UL Listed, File Number E140596, Standard UL498, CSA/CUL approved. cULus listed. Standard CSA C22.2 No. 42. Conform to NEMA WD-1 and WD-6.

Technical Information

Performance

Electrical

Dielectric Withstand Voltage	2000V Min.
Maximum Working Voltage	125V
Current Interrupting	15A
Temperature Rise	30° Max.

Mechanical


Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#12 - #14 AWG
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	Complies with UL498
--------------	---------------------

Materials

Face	Thermoplastic (PVC)
Back Body	Thermoplastic
Line Contacts	.031 Brass
Mounting Strap	.040 Zinc-Plated Steel
Ground Contacts	Brass
Terminal Screws	#8 Tri-Drive Plated Steel
Ground Screw	#8 Hex Tri-Drive Plated Steel Green Chromate
Auto-Ground Clip	Plated Steel
Mounting Screws	#6 Tri-Drive Steel

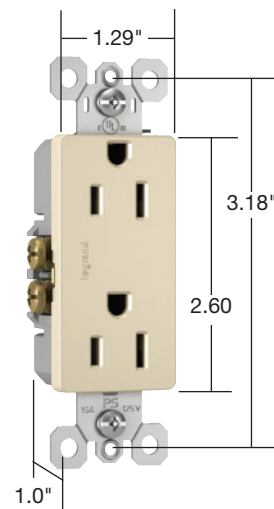

885LA

Warranty

1 Year

Ordering Information

radiant® Receptacles

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A	VAC			 US UL498	 C22.2 No. 42	 US cULus
885I	15	125	Ivory	5-15R	•	•	•
885W	15	125	White	5-15R	•	•	•
885	15	125	Brown	5-15R	•	•	•
885GRY	15	125	Gray	5-15R	•	•	•
885BK	15	125	Black	5-15R	•	•	•
885LA	15	125	Light Almond	5-15R	•	•	•

Self-Grounding radiant® Receptacles

885SI	15	125	Ivory	5-15R	•	•	•
885SW	15	125	White	5-15R	•	•	•
885SLA	15	125	Light Almond	5-15R	•	•	•
885SBK	15	125	Black	5-15R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R

Vertical Markets

- Residential
- Multiple Dwelling
- Hospitality/Lodging

Also available in the radiant® collection...

- GFCI Receptacles
- Home Automation Controls
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Sensors
- Combination Devices
- USB Charging Devices
- Night Lights
- Screwless Wall Plates

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.


All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us
570 Applewood Crescent
Vaughan, Ontario L4K 4B4
905.738.9195
www.legrand.ca

FOLLOW US



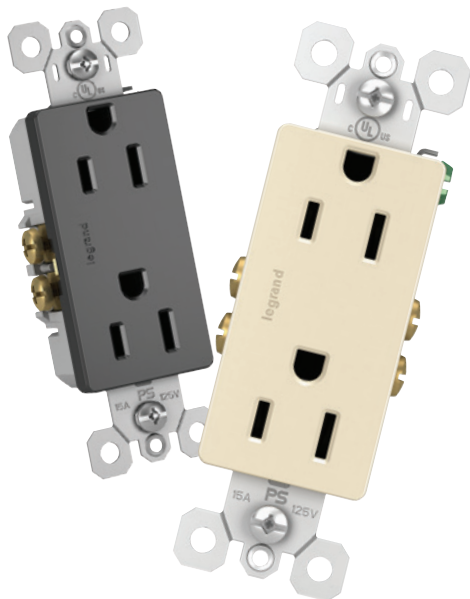

Same reliable receptacles,
now with a subtle new look.

885, 885S

Aesthetically improved yet reliable as ever, these receptacles are part of the radiant® collection – offering a better fit, form and finish. Ideal for residential, multi-dwelling and hospitality applications.

Features & Benefits

High-impact resistant thermoplastic construction.



Extra-long strap

885LA

- Part of the radiant® collection.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.

- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.

- Push wire accepts #14 AWG solid only.
- Low profile face.
- Self-grounding models provide automatic ground clip.

3rd Party Compliance



UL Listed, File Number E140596, Standard UL498, CSA/CUL approved. cULus listed. Standard CSA C22.2 No. 42. Conform to NEMA WD-1 and WD-6.

Technical Information

Performance

Electrical

Dielectric Withstand Voltage	2000V Min.
Maximum Working Voltage	125V
Current Interrupting	15A
Temperature Rise	30° Max.

Mechanical


Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#12 - #14 AWG
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	Complies with UL498
--------------	---------------------

Materials

Face	Thermoplastic (PVC)
Back Body	Thermoplastic
Line Contacts	.031 Brass
Mounting Strap	.040 Zinc-Plated Steel
Ground Contacts	Brass
Terminal Screws	#8 Tri-Drive Plated Steel
Ground Screw	#8 Hex Tri-Drive Plated Steel Green Chromate
Auto-Ground Clip	Plated Steel
Mounting Screws	#6 Tri-Drive Steel

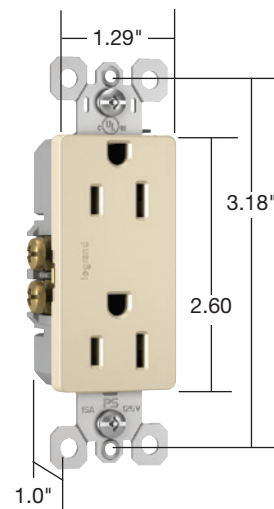

885LA

Warranty

1 Year

Ordering Information

radiant® Receptacles

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A	VAC			 US UL498	 C22.2 No. 42	 US cULus
885I	15	125	Ivory	5-15R	•	•	•
885W	15	125	White	5-15R	•	•	•
885	15	125	Brown	5-15R	•	•	•
885GRY	15	125	Gray	5-15R	•	•	•
885BK	15	125	Black	5-15R	•	•	•
885LA	15	125	Light Almond	5-15R	•	•	•

Self-Grounding radiant® Receptacles

885SI	15	125	Ivory	5-15R	•	•	•
885SW	15	125	White	5-15R	•	•	•
885SLA	15	125	Light Almond	5-15R	•	•	•
885SBK	15	125	Black	5-15R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R

Vertical Markets

- Residential
- Multiple Dwelling
- Hospitality/Lodging

Also available in the radiant® collection...

- GFCI Receptacles
- Home Automation Controls
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Sensors
- Combination Devices
- USB Charging Devices
- Night Lights
- Screwless Wall Plates

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us
570 Applewood Crescent
Vaughan, Ontario L4K 4B4
905.738.9195
www.legrand.ca

FOLLOW US

