


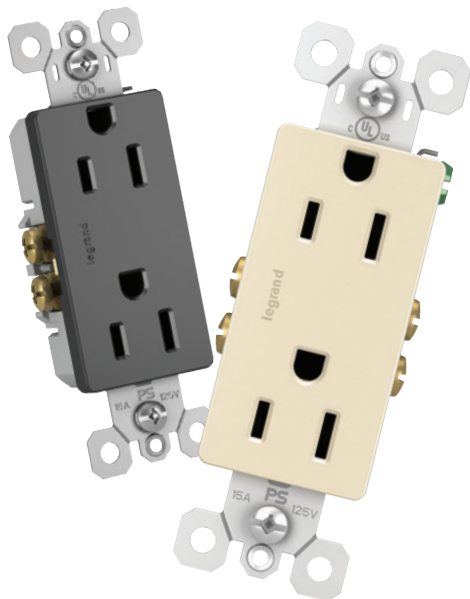

Same reliable receptacles,  
now with a subtle new look.

885, 885S

Aesthetically improved yet reliable as ever, these receptacles are part of the radiant® collection – offering a better fit, form and finish. Ideal for residential, multi-dwelling and hospitality applications.

## Features & Benefits

High-impact resistant thermoplastic construction.



Extra-long strap

885LA

- Part of the radiant® collection.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.

- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.

- Push wire accepts #14 AWG solid only.
- Low profile face.
- Self-grounding models provide automatic ground clip.

## 3rd Party Compliance



UL Listed, File Number E140596, Standard UL498, CSA/CUL approved. cULus listed. Standard CSA C22.2 No. 42. Conform to NEMA WD-1 and WD-6.

## Technical Information

### Performance

#### Electrical

|                              |            |
|------------------------------|------------|
| Dielectric Withstand Voltage | 2000V Min. |
| Maximum Working Voltage      | 125V       |
| Current Interrupting         | 15A        |
| Temperature Rise             | 30° Max.   |

#### Mechanical


|                         |                                                                         |
|-------------------------|-------------------------------------------------------------------------|
| Terminal Identification | Terminal Identification in accordance with UL 498 (Brass, White, Green) |
| Terminal Accommodation  | #12 - #14 AWG                                                           |
| Product Identification  | Ratings are a permanent part of the device                              |

#### Environmental

|              |                     |
|--------------|---------------------|
| Flammability | Complies with UL498 |
|--------------|---------------------|

### Materials

|                  |                                              |
|------------------|----------------------------------------------|
| Face             | Thermoplastic (PVC)                          |
| Back Body        | Thermoplastic                                |
| Line Contacts    | .031 Brass                                   |
| Mounting Strap   | .040 Zinc-Plated Steel                       |
| Ground Contacts  | Brass                                        |
| Terminal Screws  | #8 Tri-Drive Plated Steel                    |
| Ground Screw     | #8 Hex Tri-Drive Plated Steel Green Chromate |
| Auto-Ground Clip | Plated Steel                                 |
| Mounting Screws  | #6 Tri-Drive Steel                           |

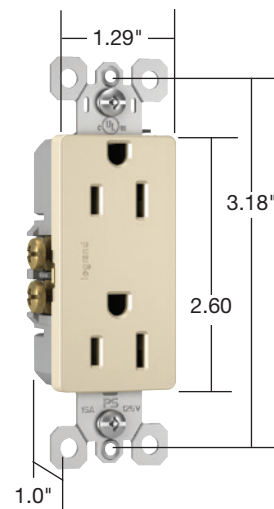

**885LA**

## Warranty

1 Year

## Ordering Information

### radiant® Receptacles

| Catalog Number | Rating |     | Color        | NEMA<br>Config. No. | 3rd Party Compliance                                                                    |                                                                                                  |                                                                                           |
|----------------|--------|-----|--------------|---------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
|                | A      | VAC |              |                     |  UL498 |  C22.2 No. 42 |  cULus |
| 885I           | 15     | 125 | Ivory        | 5-15R               | •                                                                                       | •                                                                                                | •                                                                                         |
| 885W           | 15     | 125 | White        | 5-15R               | •                                                                                       | •                                                                                                | •                                                                                         |
| 885            | 15     | 125 | Brown        | 5-15R               | •                                                                                       | •                                                                                                | •                                                                                         |
| 885GRY         | 15     | 125 | Gray         | 5-15R               | •                                                                                       | •                                                                                                | •                                                                                         |
| 885BK          | 15     | 125 | Black        | 5-15R               | •                                                                                       | •                                                                                                | •                                                                                         |
| 885LA          | 15     | 125 | Light Almond | 5-15R               | •                                                                                       | •                                                                                                | •                                                                                         |

### Self-Grounding radiant® Receptacles

|        |    |     |              |       |   |   |   |
|--------|----|-----|--------------|-------|---|---|---|
| 885SI  | 15 | 125 | Ivory        | 5-15R | • | • | • |
| 885SW  | 15 | 125 | White        | 5-15R | • | • | • |
| 885SLA | 15 | 125 | Light Almond | 5-15R | • | • | • |
| 885SBK | 15 | 125 | Black        | 5-15R | • | • | • |

### 2 Pole, 3 Wire



NEMA  
5-15R

---

## Vertical Markets

- Residential
- Multiple Dwelling
- Hospitality/Lodging

---

## Also available in the radiant® collection...

- GFCI Receptacles
- Home Automation Controls
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Sensors
- Combination Devices
- USB Charging Devices
- Night Lights
- Screwless Wall Plates

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.


All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US



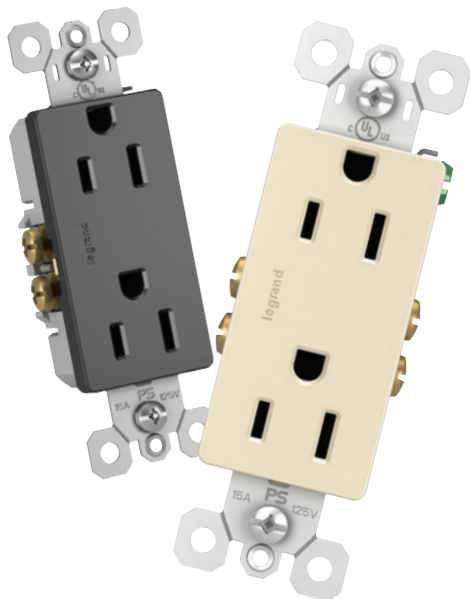

Same reliable receptacles,  
now with a subtle new look.

885, 885S

Aesthetically improved yet reliable as ever, these receptacles are part of the radiant® collection – offering a better fit, form and finish. Ideal for residential, multi-dwelling and hospitality applications.

## Features & Benefits

High-impact resistant thermoplastic construction.



Extra-long strap

885LA

- Part of the radiant® collection.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.
- Low profile face.
- Self-grounding models provide automatic ground clip.

## 3rd Party Compliance



UL Listed, File Number E140596, Standard UL498, CSA/CUL approved. cULus listed. Standard CSA C22.2 No. 42. Conform to NEMA WD-1 and WD-6.

## Technical Information

### Performance

#### Electrical

|                              |            |
|------------------------------|------------|
| Dielectric Withstand Voltage | 2000V Min. |
| Maximum Working Voltage      | 125V       |
| Current Interrupting         | 15A        |
| Temperature Rise             | 30° Max.   |

#### Mechanical


|                         |                                                                         |
|-------------------------|-------------------------------------------------------------------------|
| Terminal Identification | Terminal Identification in accordance with UL 498 (Brass, White, Green) |
| Terminal Accommodation  | #12 - #14 AWG                                                           |
| Product Identification  | Ratings are a permanent part of the device                              |

#### Environmental

|              |                     |
|--------------|---------------------|
| Flammability | Complies with UL498 |
|--------------|---------------------|

### Materials

|                  |                                              |
|------------------|----------------------------------------------|
| Face             | Thermoplastic (PVC)                          |
| Back Body        | Thermoplastic                                |
| Line Contacts    | .031 Brass                                   |
| Mounting Strap   | .040 Zinc-Plated Steel                       |
| Ground Contacts  | Brass                                        |
| Terminal Screws  | #8 Tri-Drive Plated Steel                    |
| Ground Screw     | #8 Hex Tri-Drive Plated Steel Green Chromate |
| Auto-Ground Clip | Plated Steel                                 |
| Mounting Screws  | #6 Tri-Drive Steel                           |

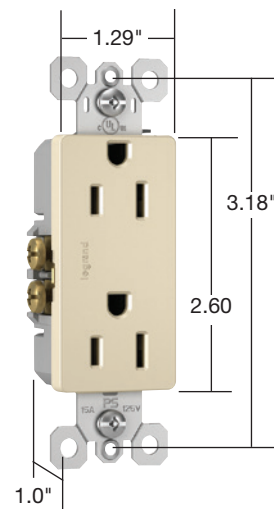

**885LA**

## Warranty

1 Year

## Ordering Information

### radiant® Receptacles

| Catalog Number | Rating |     | Color        | NEMA<br>Config. No. | 3rd Party Compliance                                                                          |                                                                                                  |                                                                                                 |
|----------------|--------|-----|--------------|---------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|                | A      | VAC |              |                     |  US<br>UL498 |  C22.2 No. 42 |  US<br>cULus |
| 885I           | 15     | 125 | Ivory        | 5-15R               | •                                                                                             | •                                                                                                | •                                                                                               |
| 885W           | 15     | 125 | White        | 5-15R               | •                                                                                             | •                                                                                                | •                                                                                               |
| 885            | 15     | 125 | Brown        | 5-15R               | •                                                                                             | •                                                                                                | •                                                                                               |
| 885GRY         | 15     | 125 | Gray         | 5-15R               | •                                                                                             | •                                                                                                | •                                                                                               |
| 885BK          | 15     | 125 | Black        | 5-15R               | •                                                                                             | •                                                                                                | •                                                                                               |
| 885LA          | 15     | 125 | Light Almond | 5-15R               | •                                                                                             | •                                                                                                | •                                                                                               |

### Self-Grounding radiant® Receptacles

|        |    |     |              |       |   |   |   |
|--------|----|-----|--------------|-------|---|---|---|
| 885SI  | 15 | 125 | Ivory        | 5-15R | • | • | • |
| 885SW  | 15 | 125 | White        | 5-15R | • | • | • |
| 885SLA | 15 | 125 | Light Almond | 5-15R | • | • | • |
| 885SBK | 15 | 125 | Black        | 5-15R | • | • | • |

### 2 Pole, 3 Wire



NEMA  
5-15R

---

## Vertical Markets

- Residential
- Multiple Dwelling
- Hospitality/Lodging

---

## Also available in the radiant® collection...

- GFCI Receptacles
- Home Automation Controls
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Sensors
- Combination Devices
- USB Charging Devices
- Night Lights
- Screwless Wall Plates

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US

