

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P


## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### DESCRIPTION

290W Power and Color Select Optic Swap LED Area Light | 120-277V Input | Bronze Housing | Adjustable Pole Mount Kit Included

### APPLICATION

Pole-mount or structure-mount outdoor illumination needs (including parking lots, auto dealerships, pathways, roadways, recreational venues, and other general area lighting requirements)

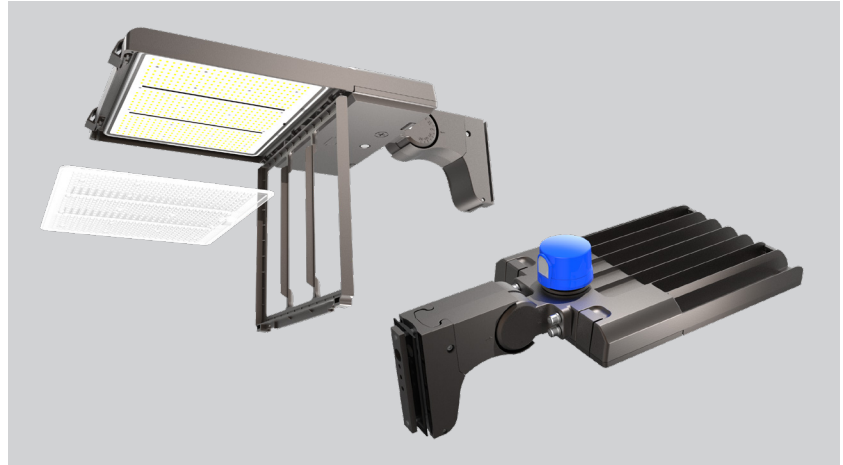

### PRODUCT FEATURES

- Keystone Power Select technology (290/210/185W)
- Keystone Color Select technology (3000/4000/5000K)
- Innovative optic swap capability under door frame and latch design for quick lens change
- Three lenses in the box: Type III installed, Types IV and V included
- Type II lens sold separately. See below for details
- Heavy duty die cast aluminum housing with ample heat sinking
- Low-profile design delivers high-performance illumination and improves application site aesthetics
- True U0 design for Dark Sky friendly performance that eliminates undesirable sky glow
- Integrated NEMA/ANSI C136.10 7-pin twist-lock receptacle with 3-pin photocell and shorting cap. Standard on all fixtures, simplifies ordering requirements for photo control needs
- Comes with a pre-installed adjustable pole mount kit for easy and quick mounting to square or round poles
- Keystone 0-10V dimming driver
- Ambient operating temperature: -40°C/-40°F to 50°C/122°F
- UL Certified, IP65 rated
- Power factor: > 0.95
- THD: < 20%
- LED chip lifetime: L70 > 100,000 hrs @ 25°C/77°F ambient fixture temperature
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

### PRODUCT SPECIFICATIONS

| Catalog No.                         | Wattage | CCT   | Lumens | Efficacy | Input Voltage | Dimming | CRI | Distribution Pattern                        | Photocell Included | Housing Color | Legacy Equivalent |
|-------------------------------------|---------|-------|--------|----------|---------------|---------|-----|---------------------------------------------|--------------------|---------------|-------------------|
| KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P | 290W    | 3000K | 36320  | 125 lm/W | 120-277V      | 0-10V   | >80 | Type III Installed, Types IV and V Included | Yes                | Bronze        | 1000W MH          |
|                                     |         | 4000K | 42770  | 147 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 5000K | 38700  | 133 lm/W |               |         |     |                                             |                    |               |                   |
|                                     | 210W    | 3000K | 27300  | 130 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 4000K | 31710  | 151 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 5000K | 28980  | 138 lm/W |               |         |     |                                             |                    |               |                   |
|                                     | 185W    | 3000K | 22970  | 124 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 4000K | 27060  | 146 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 5000K | 24440  | 132 lm/W |               |         |     |                                             |                    |               |                   |

\* Fixtures with Type 2 (II) and Type 4 (IV) optics are available and assembled to order. Lead times may apply.

Type II (2) lenses are sold separately. For more information, see accessories page below or contact Keystone with questions.


\*\*Fixtures (and mounts) with alternate housing colors are available and made to order. Extended lead times apply. Please see catalog number breakdown for full ordering code details.

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### PHYSICAL SPECIFICATIONS




#### POLE-MOUNT LED AREA LIGHT FIXTURE

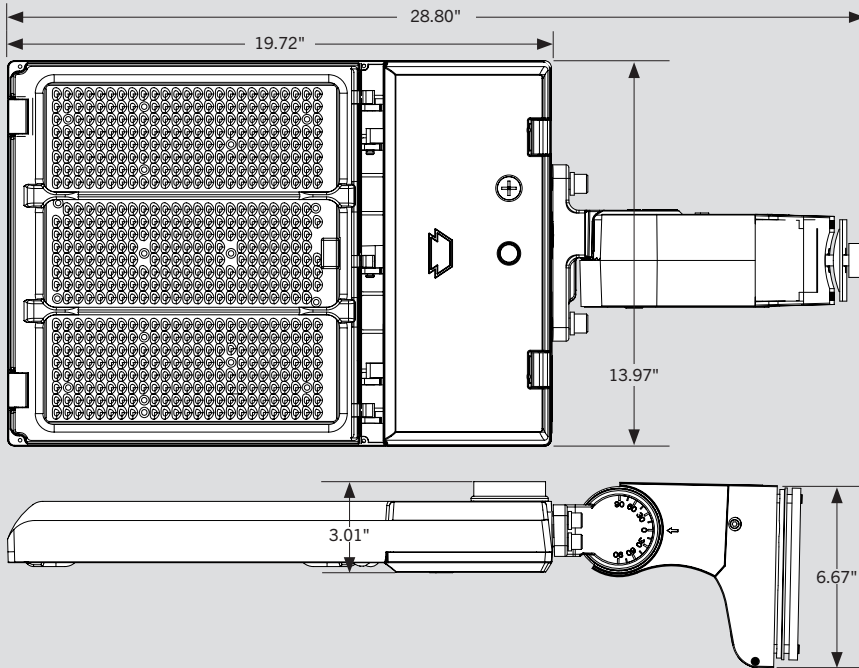

#### PACKAGING

|                   |                            |
|-------------------|----------------------------|
| Carton Quantity   | 1 piece                    |
| Carton Dimensions | 5.63"H x 15.95"W x 26.18"L |
| Carton Weight     | 17.53 lbs                  |


#### ADJUSTABLE POLE MOUNT KIT DRILLING HOLES

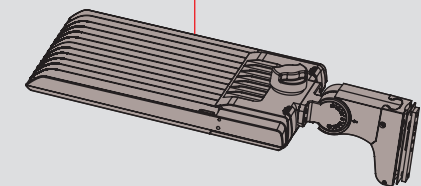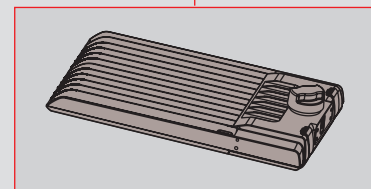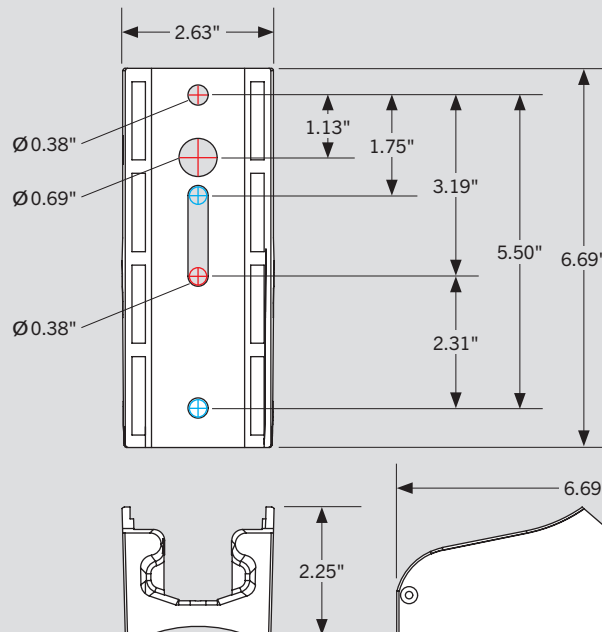

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### WIRING DIAGRAM

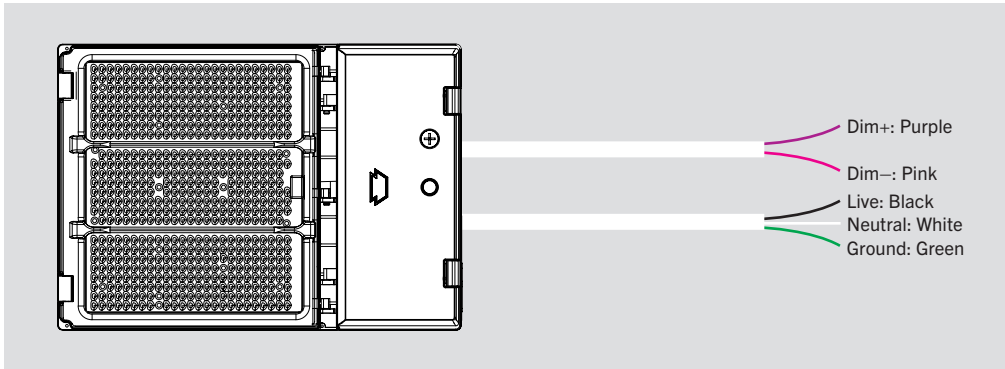


- This fixture comes pre-wired with a 7-pin twist-lock receptacle with shorting cap. Make input connections as needed and ensure connections are protected from exposure to the elements.
- **Input voltage rating: 120–277V**
- Ensure that input voltage on site matches the fixture you intend to install.

### POWER SELECT (WATTAGE) AND COLOR SELECT (CCT) ADJUSTMENT


This fixture is equipped with field-adjustable Keystone Power Select and Color Select technology.

1. Ensure power is off to the fixture.
2. Open the driver compartment located on the underside of the fixture.
3. Adjust switches to desired settings.




#### POWER SELECT ADJUSTMENT DIAL

Set switch to adjust wattage between 290W, 210W, and 185W.  
Fixture comes preset at 290W.



#### COLOR SELECT ADJUSTMENT SWITCH

Set switch to adjust CCT between 3000K, 4000K, and 5000K.  
Fixture comes preset at 5000K.

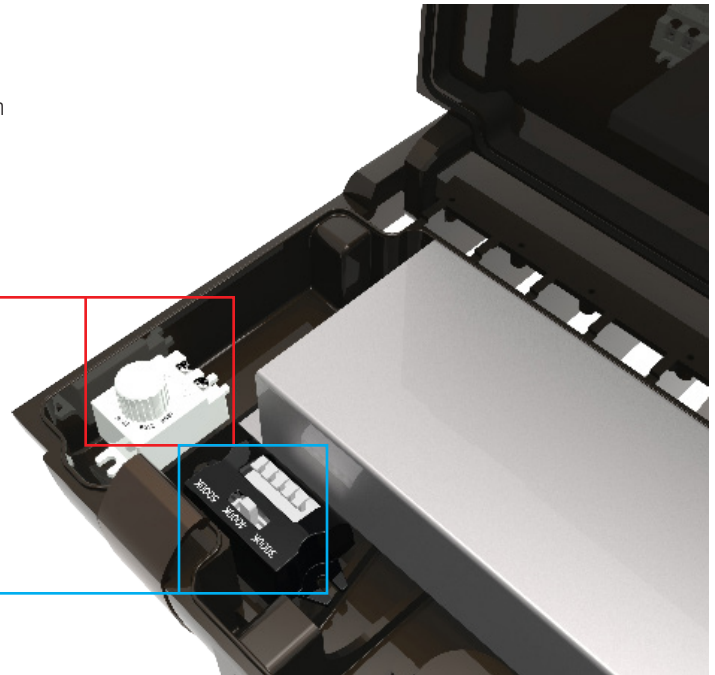


# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### LIGHT DISTRIBUTION PATTERN


#### TYPE III (3)

Pole mount view from above. Area light mounted at 30 ft.  
Each square is 10 ft x 10 ft

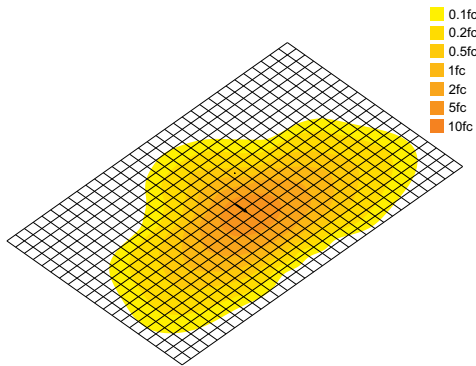


#### TYPE V (5)

Pole mount view from above. Area light mounted at 30 ft.  
Each square is 10 ft x 10 ft

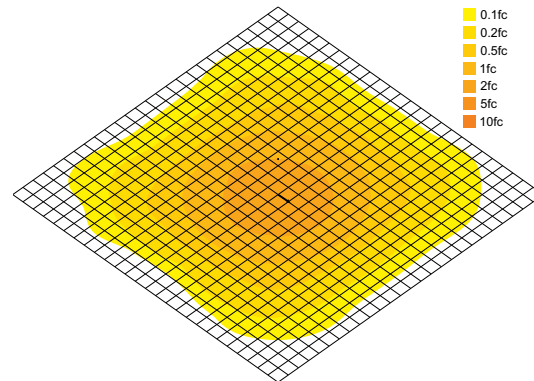


### PHOTOMETRIC SPECIFICATIONS (TYPE III [3])

#### ISOCANDELA PLOT

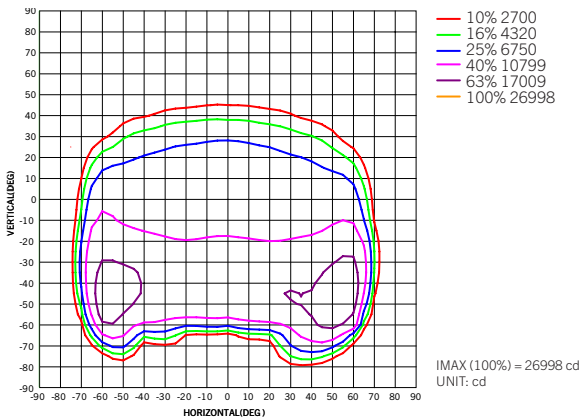


#### LUMINOUS INTENSITY DISTRIBUTION

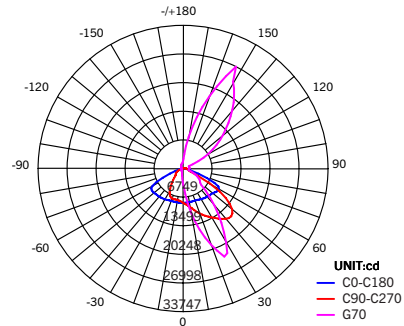


### PHOTOMETRIC SPECIFICATIONS (TYPE V [5])

#### ISOCANDELA PLOT

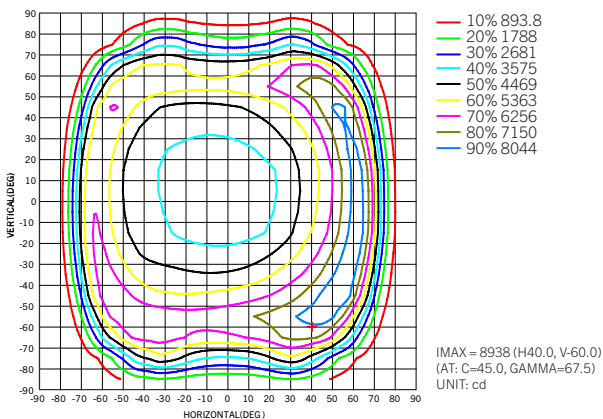

#### LUMINOUS INTENSITY DISTRIBUTION

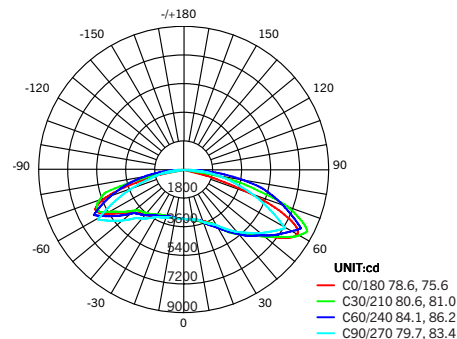

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### EPA SPECIFICATIONS

#### LARGE-SIZE FIXTURE HOUSING

- Conditions: Horizontal winds only for calculations. Worst case total projected area used for calculations.
- All drag coefficients are set as worst case 1.2.
- For details on exact EPA calculations and assumptions, please contact [productsupport@keystonetech.com](mailto:productsupport@keystonetech.com)

| EPA Calcs (1.2*ft^2   View)                                                                                 |                  | Single Fixture                                                                    | 2 Fixtures at 90°                                                                 | 2 Fixtures at 180°                                                                | 3 Fixtures at 90°                                                                 | 3 Fixtures at 120°                                                                | 4 Fixtures at 90°                                                                   | 2 Fixtures Side-by-Side                                                             | 3 Fixtures Side-by-Side                                                             | 4 Fixtures Side-by-Side                                                             |
|-------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Mounting Application                                                                                        | Fixture Position |  |  |  |  |  |  |  |  |  |
| Adjustable Pole Mount<br>  | Horizontal       | 0.62 sq. ft.                                                                      | 0.90 sq. ft.                                                                      | 1.24 sq. ft.                                                                      | 1.42 sq. ft.                                                                      | 1.48 sq. ft.                                                                      | 1.42 sq. ft.                                                                        | 0.74 sq. ft.                                                                        | 1.11 sq. ft.                                                                        | 1.48 sq. ft.                                                                        |
| Adjustable Pole Mount<br> | 45°              | 1.85 sq. ft.                                                                      | 2.43 sq. ft.                                                                      | 1.85 sq. ft.                                                                      | 3.01 sq. ft.                                                                      | 4.42 sq. ft.                                                                      | 3.01 sq. ft.                                                                        | 3.70 sq. ft.                                                                        | 5.55 sq. ft.                                                                        | 7.40 sq. ft.                                                                        |

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### ACCESSORIES (SOLD SEPARATELY)

#### SENSORS

Factory-Installable OR Field-Installable (field-installable purchased separately)

| ✓ | SUFFIX* | CATALOG NUMBER       | DESCRIPTION                                                                                                            | UPC          | EASY CODE |
|---|---------|----------------------|------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
|   | /MW3    | KTS-MW3-12V-PKO      | 12V Microwave Occupancy Sensor                                                                                         | 843654130637 | TRM-32    |
|   | /FC3    | KTSL-FC3-12V-PKO-PIR | Bluetooth mesh wireless Smart Port LED controller for SmartLoop system with integrated daylight and PIR motion sensor. | 843654138862 | OCW-60    |
|   | /FC4    | KTSL-FC4-12V-PKO     | Bluetooth mesh wireless screw-in low voltage fixture controller for SmartLoop system                                   | 843654149066 | RUN-10    |



\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

Field-Installable / Field-Use ONLY (purchased separately)


| CATALOG NUMBER        | DESCRIPTION                                                                               | UPC          | EASY CODE |
|-----------------------|-------------------------------------------------------------------------------------------|--------------|-----------|
| KTS-MW3-REMOTECONTROL | Remote Control for KTS-MW3-12V-XX Sensors, Sets/adjusts all sensor performance parameters | 843654132020 | XSR-61    |



#### LENSES

Field-Installable / Field-Use ONLY (purchased separately)

| CATALOG NUMBER          | DESCRIPTION                                                                    | UPC          | EASY CODE |
|-------------------------|--------------------------------------------------------------------------------|--------------|-----------|
| KT-ALED-LENS-L2-2CS-KIT | Type II Optics Lens for Color Select, Large Size Housing, Series 2 Area Lights | 843654153858 | HXC-12    |



\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).



# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

**ACCESSORIES CONTINUED** (SOLD SEPARATELY)

### MOUNTS AND BRACKETS

Field-Installable / Field-Use **ONLY** (purchased separately)

| CATALOG NUMBER    | DESCRIPTION                                                                  | UPC          | EASY CODE |
|-------------------|------------------------------------------------------------------------------|--------------|-----------|
| KT-ALED-GS-L2-KIT | Reversible Glare Shield for Large Size Housing, Series 2 Area Lights, Bronze | 843654153810 | RDW-18    |



Glare Shield  
KT-ALED-GS-L1-KIT

\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

### ORDERING INFORMATION

| ORDER CODE                          | PACK QTY. | UPC          | Easy Code |
|-------------------------------------|-----------|--------------|-----------|
| KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P | 1         | 843654153124 | LWD-80    |

### CATALOG NUMBER BREAKDOWN

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

- |                             |                             |
|-----------------------------|-----------------------------|
| 1 Keystone Technologies     | 9 Optic Swap Designation    |
| 2 Fixture Type              | 10 Pole Mount Adjustable    |
| 3 LED Technology            | 11 80 CRI                   |
| 4 Max Wattage               | 12 Color Select             |
| 5 Power Select              | 13 Color Select Designation |
| 6 Size/ Shape               | 14 0-10V Dimming            |
| 7 Style/ Design Designation | 15 Stock Package            |
| 8 Optic Swap                |                             |

#### 9 Optic Swap Designation

B Type III lens installed, Type IV and V lens included

#### 13 Color Select Designation

B 3000/4000/5000K

### ORDERING EXAMPLES

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

**KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P /7PRS**

KEYSTONE FIXTURE

CATALOG NUMBER

KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

**KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P**

SENSORS

| ✓ | SUFFIX | CATALOG NUMBER |
|---|--------|----------------|
| ✓ | /7PRS  | KT-RSC-7PN     |

\* When ordering more than one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.

**Note:** All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P


## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### DESCRIPTION

290W Power and Color Select Optic Swap LED Area Light | 120-277V Input | Bronze Housing | Adjustable Pole Mount Kit Included

### APPLICATION

Pole-mount or structure-mount outdoor illumination needs (including parking lots, auto dealerships, pathways, roadways, recreational venues, and other general area lighting requirements)

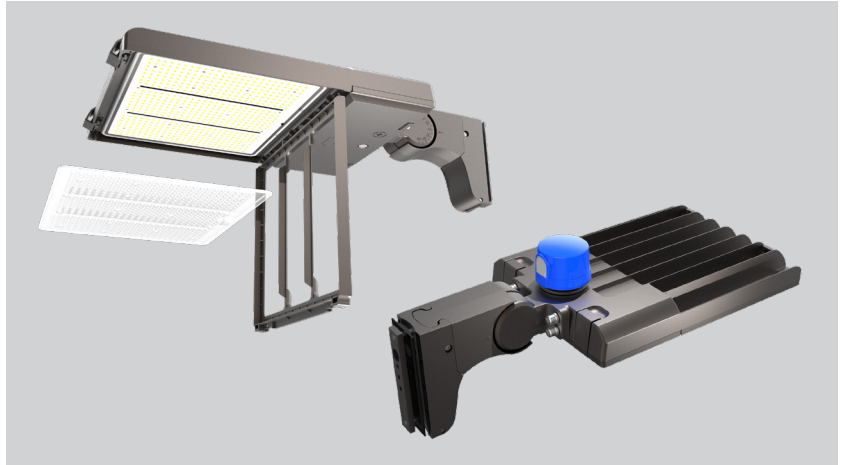

### PRODUCT FEATURES

- Keystone Power Select technology (290/210/185W)
- Keystone Color Select technology (3000/4000/5000K)
- Innovative optic swap capability under door frame and latch design for quick lens change
- Three lenses in the box: Type III installed, Types IV and V included
- Type II lens sold separately. See below for details
- Heavy duty die cast aluminum housing with ample heat sinking
- Low-profile design delivers high-performance illumination and improves application site aesthetics
- True U0 design for Dark Sky friendly performance that eliminates undesirable sky glow
- Integrated NEMA/ANSI C136.10 7-pin twist-lock receptacle with 3-pin photocell and shorting cap. Standard on all fixtures, simplifies ordering requirements for photo control needs
- Comes with a pre-installed adjustable pole mount kit for easy and quick mounting to square or round poles
- Keystone 0-10V dimming driver
- Ambient operating temperature: -40°C/-40°F to 50°C/122°F
- UL Certified, IP65 rated
- Power factor: > 0.95
- THD: < 20%
- LED chip lifetime: L70 > 100,000 hrs @ 25°C/77°F ambient fixture temperature
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

### PRODUCT SPECIFICATIONS

| Catalog No.                         | Wattage | CCT   | Lumens | Efficacy | Input Voltage | Dimming | CRI | Distribution Pattern                        | Photocell Included | Housing Color | Legacy Equivalent |
|-------------------------------------|---------|-------|--------|----------|---------------|---------|-----|---------------------------------------------|--------------------|---------------|-------------------|
| KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P | 290W    | 3000K | 36320  | 125 lm/W | 120-277V      | 0-10V   | >80 | Type III Installed, Types IV and V Included | Yes                | Bronze        | 1000W MH          |
|                                     |         | 4000K | 42770  | 147 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 5000K | 38700  | 133 lm/W |               |         |     |                                             |                    |               |                   |
|                                     | 210W    | 3000K | 27300  | 130 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 4000K | 31710  | 151 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 5000K | 28980  | 138 lm/W |               |         |     |                                             |                    |               |                   |
|                                     | 185W    | 3000K | 22970  | 124 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 4000K | 27060  | 146 lm/W |               |         |     |                                             |                    |               |                   |
|                                     |         | 5000K | 24440  | 132 lm/W |               |         |     |                                             |                    |               |                   |

\* Fixtures with Type 2 (II) and Type 4 (IV) optics are available and assembled to order. Lead times may apply.

Type II (2) lenses are sold separately. For more information, see accessories page below or contact Keystone with questions.

\*\*Fixtures (and mounts) with alternate housing colors are available and made to order. Extended lead times apply. Please see catalog number breakdown for full ordering code details.




# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### PHYSICAL SPECIFICATIONS




#### POLE-MOUNT LED AREA LIGHT FIXTURE

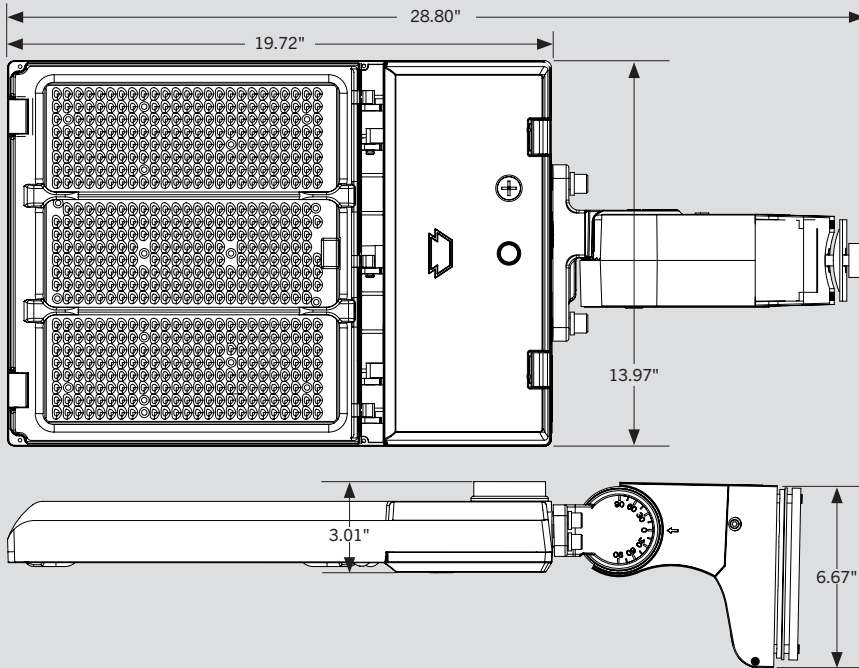

#### PACKAGING

|                   |                            |
|-------------------|----------------------------|
| Carton Quantity   | 1 piece                    |
| Carton Dimensions | 5.63"H x 15.95"W x 26.18"L |
| Carton Weight     | 17.53 lbs                  |


#### ADJUSTABLE POLE MOUNT KIT DRILLING HOLES

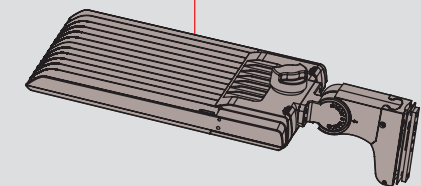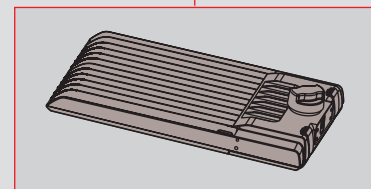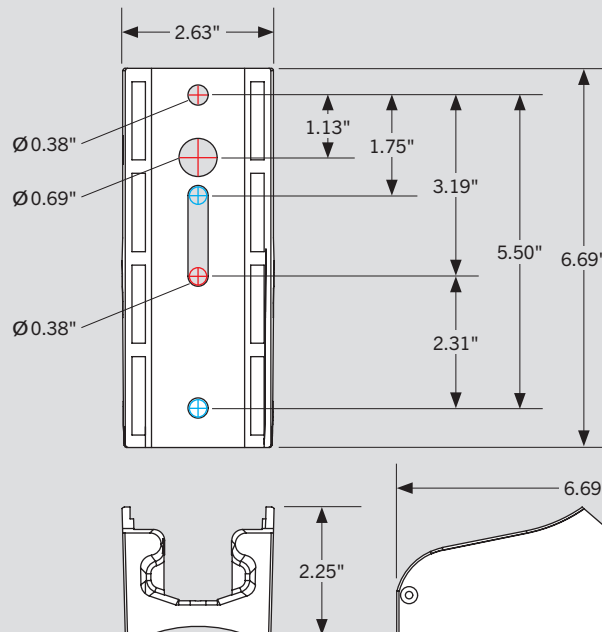

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### WIRING DIAGRAM

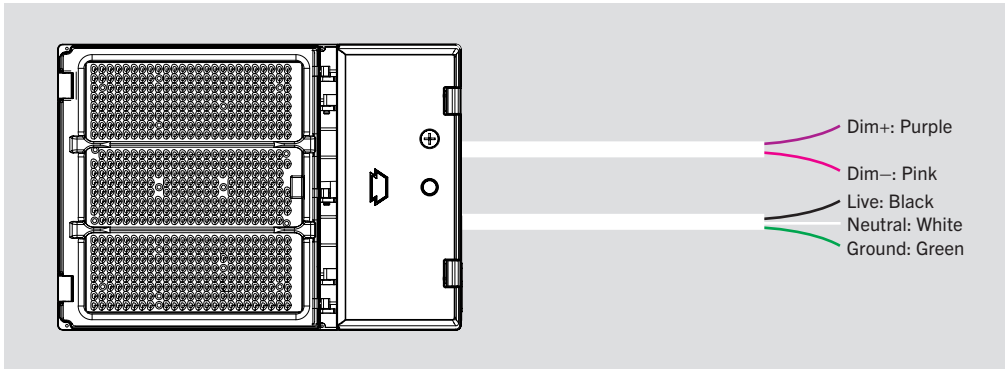


- This fixture comes pre-wired with a 7-pin twist-lock receptacle with shorting cap. Make input connections as needed and ensure connections are protected from exposure to the elements.
- **Input voltage rating: 120–277V**
- Ensure that input voltage on site matches the fixture you intend to install.

### POWER SELECT (WATTAGE) AND COLOR SELECT (CCT) ADJUSTMENT


This fixture is equipped with field-adjustable Keystone Power Select and Color Select technology.

1. Ensure power is off to the fixture.
2. Open the driver compartment located on the underside of the fixture.
3. Adjust switches to desired settings.




#### POWER SELECT ADJUSTMENT DIAL

Set switch to adjust wattage between 290W, 210W, and 185W.  
Fixture comes preset at 290W.



#### COLOR SELECT ADJUSTMENT SWITCH

Set switch to adjust CCT between 3000K, 4000K, and 5000K.  
Fixture comes preset at 5000K.

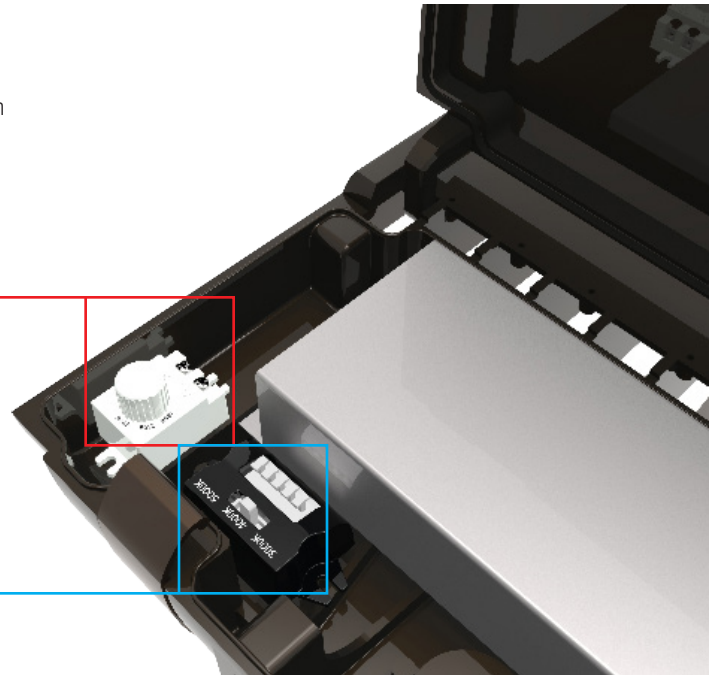


# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### LIGHT DISTRIBUTION PATTERN


#### TYPE III (3)

Pole mount view from above. Area light mounted at 30 ft.  
Each square is 10 ft x 10 ft

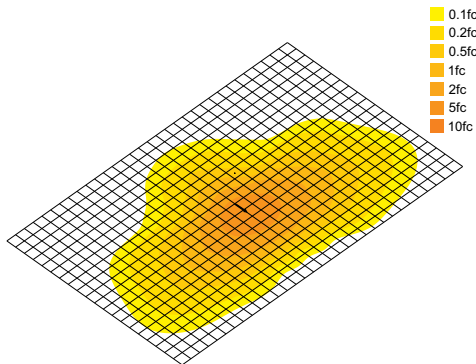


#### TYPE V (5)

Pole mount view from above. Area light mounted at 30 ft.  
Each square is 10 ft x 10 ft

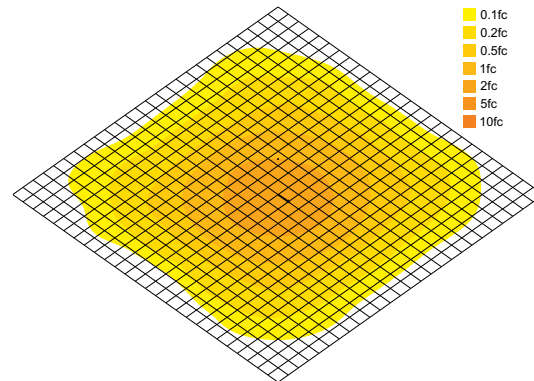


### PHOTOMETRIC SPECIFICATIONS (TYPE III [3])

#### ISOCANDELA PLOT

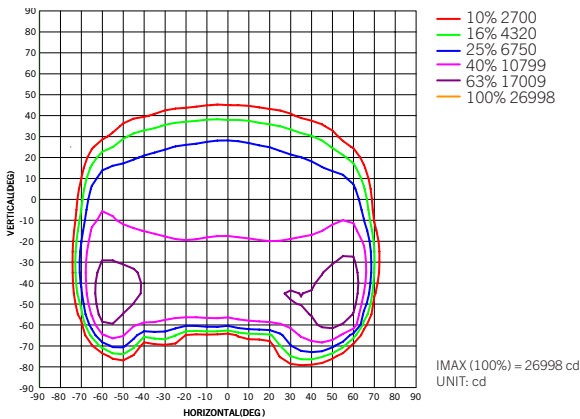


#### LUMINOUS INTENSITY DISTRIBUTION

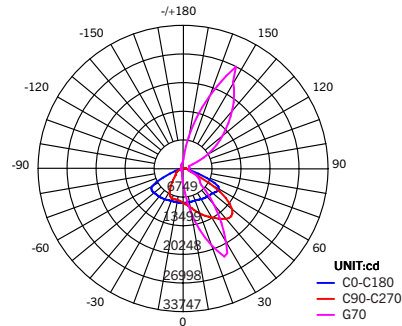


### PHOTOMETRIC SPECIFICATIONS (TYPE V [5])

#### ISOCANDELA PLOT

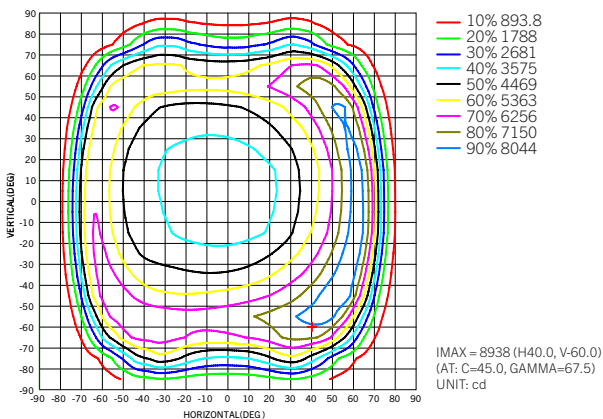

#### LUMINOUS INTENSITY DISTRIBUTION

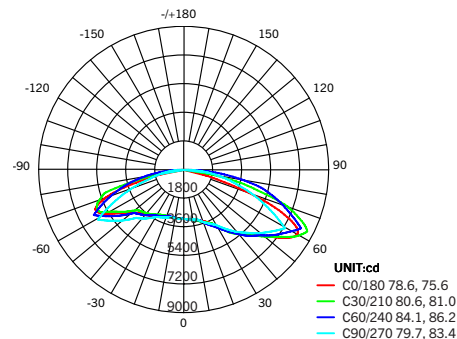

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### EPA SPECIFICATIONS

#### LARGE-SIZE FIXTURE HOUSING

- Conditions: Horizontal winds only for calculations. Worst case total projected area used for calculations.
- All drag coefficients are set as worst case 1.2.
- For details on exact EPA calculations and assumptions, please contact [productsupport@keystonetech.com](mailto:productsupport@keystonetech.com)

| EPA Calcs (1.2*ft^2   View)                                                                                |                  | Single Fixture                                                                    | 2 Fixtures at 90°                                                                 | 2 Fixtures at 180°                                                                | 3 Fixtures at 90°                                                                 | 3 Fixtures at 120°                                                                | 4 Fixtures at 90°                                                                   | 2 Fixtures Side-by-Side                                                             | 3 Fixtures Side-by-Side                                                             | 4 Fixtures Side-by-Side                                                             |
|------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Mounting Application                                                                                       | Fixture Position |  |  |  |  |  |  |  |  |  |
| Adjustable Pole Mount<br>  | Horizontal       | 0.62 sq. ft.                                                                      | 0.90 sq. ft.                                                                      | 1.24 sq. ft.                                                                      | 1.42 sq. ft.                                                                      | 1.48 sq. ft.                                                                      | 1.42 sq. ft.                                                                        | 0.74 sq. ft.                                                                        | 1.11 sq. ft.                                                                        | 1.48 sq. ft.                                                                        |
| Adjustable Pole Mount<br> | 45°              | 1.85 sq. ft.                                                                      | 2.43 sq. ft.                                                                      | 1.85 sq. ft.                                                                      | 3.01 sq. ft.                                                                      | 4.42 sq. ft.                                                                      | 3.01 sq. ft.                                                                        | 3.70 sq. ft.                                                                        | 5.55 sq. ft.                                                                        | 7.40 sq. ft.                                                                        |

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

### ACCESSORIES (SOLD SEPARATELY)

#### SENSORS

Factory-Installable OR Field-Installable (field-installable purchased separately)

| ✓ | SUFFIX* | CATALOG NUMBER       | DESCRIPTION                                                                                                            | UPC          | EASY CODE |
|---|---------|----------------------|------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
|   | /MW3    | KTS-MW3-12V-PKO      | 12V Microwave Occupancy Sensor                                                                                         | 843654130637 | TRM-32    |
|   | /FC3    | KTSL-FC3-12V-PKO-PIR | Bluetooth mesh wireless Smart Port LED controller for SmartLoop system with integrated daylight and PIR motion sensor. | 843654138862 | OCW-60    |
|   | /FC4    | KTSL-FC4-12V-PKO     | Bluetooth mesh wireless screw-in low voltage fixture controller for SmartLoop system                                   | 843654149066 | RUN-10    |



\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

Field-Installable / Field-Use ONLY (purchased separately)


| CATALOG NUMBER        | DESCRIPTION                                                                               | UPC          | EASY CODE |
|-----------------------|-------------------------------------------------------------------------------------------|--------------|-----------|
| KTS-MW3-REMOTECONTROL | Remote Control for KTS-MW3-12V-XX Sensors, Sets/adjusts all sensor performance parameters | 843654132020 | XSR-61    |



#### LENSES

Field-Installable / Field-Use ONLY (purchased separately)

| CATALOG NUMBER          | DESCRIPTION                                                                    | UPC          | EASY CODE |
|-------------------------|--------------------------------------------------------------------------------|--------------|-----------|
| KT-ALED-LENS-L2-2CS-KIT | Type II Optics Lens for Color Select, Large Size Housing, Series 2 Area Lights | 843654153858 | HXC-12    |



\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

## POLE-MOUNT LED AREA LIGHT PREMIUM PACKAGE

**ACCESSORIES CONTINUED** (SOLD SEPARATELY)

### MOUNTS AND BRACKETS

Field-Installable / Field-Use **ONLY** (purchased separately)

| CATALOG NUMBER    | DESCRIPTION                                                                  | UPC          | EASY CODE |
|-------------------|------------------------------------------------------------------------------|--------------|-----------|
| KT-ALED-GS-L2-KIT | Reversible Glare Shield for Large Size Housing, Series 2 Area Lights, Bronze | 843654153810 | RDW-18    |



\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

### ORDERING INFORMATION

| ORDER CODE                          | PACK QTY. | UPC          | Easy Code |
|-------------------------------------|-----------|--------------|-----------|
| KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P | 1         | 843654153124 | LWD-80    |

### CATALOG NUMBER BREAKDOWN

# KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

- |                             |                             |
|-----------------------------|-----------------------------|
| 1 Keystone Technologies     | 9 Optic Swap Designation    |
| 2 Fixture Type              | 10 Pole Mount Adjustable    |
| 3 LED Technology            | 11 80 CRI                   |
| 4 Max Wattage               | 12 Color Select             |
| 5 Power Select              | 13 Color Select Designation |
| 6 Size/ Shape               | 14 0-10V Dimming            |
| 7 Style/ Design Designation | 15 Stock Package            |
| 8 Optic Swap                |                             |

#### 9 Optic Swap Designation

B Type III lens installed, Type IV and V lens included

#### 13 Color Select Designation

B 3000/4000/5000K

### ORDERING EXAMPLES

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

**KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P /7PRS**

KEYSTONE FIXTURE

CATALOG NUMBER

KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

**KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P**

SENSORS

| ✓ SUFFIX | CATALOG NUMBER |
|----------|----------------|
| ✓ /7PRS  | KT-RSC-7PN     |

\* When ordering more than one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.

**Note:** All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.