

KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

DESCRIPTION

High Power Floodlight | Power Select | Color Select | 120-277V or 277-480V Input | 80 CRI | Bronze or White Housing

APPLICATION

Ground, pole, or building mount applications (parking lots, auto dealerships, building facades, signs, recreational venues, general area lighting)



10 YEAR
LIMITED WARRANTY

PRODUCT FEATURES

- Keystone Power Select technology (140/100W or 290/210W)
- Keystone Color Select technology (3000/4000/5000K)
- High power floodlight with innovative design based on established floodlight principles
- Suitable for ground, pole, or building mount applications
- Heavy-duty slipfitter and trunnion mount options included
- 3-pin twist-lock photocell and shorting cap included with NEMA/ANSI C136.10 3-pin twist-lock receptacle
- Precision-crafted optics lens for NEMA 7H x 6V beam spread (installed), 6H x 6V and 5H x 5V also available (sold separately)
- Die-cast aluminum housing, with optional glare shield accessory (sold separately)
- Keystone 0-10V dimming driver with 12V AUX power tap and 6kV surge protection
- Ambient operating temperature: -40°C/-40°F - 50°C/122°F
- UL Certified
- IP65 rated
- Power factor: > 0.95
- THD: < 20%
- L70 @ 100,000 hours @ 25°C/77°F ambient temperature
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

**** TAA options available. See Ordering Information below**

PRODUCT IMAGES



KT-FLED140PSXX-R2X-UNV-8CSB-VDIM
with Slipfitter Mount



KT-FLED140PSXX-R2X-UNV-8CSB-VDIM
with Trunnion Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM
with Slipfitter Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM
with Trunnion Mount



KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-W
with Slipfitter Mount




KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-W
with Trunnion Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-W
with Slipfitter Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-W
with Trunnion Mount



KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X


HIGH POWER FLOODLIGHT

PRODUCT SPECIFICATIONS

Catalog Number	Selectable Wattage	Selectable CCT	Lumen Output	Efficacy	Input Voltage	CRI	Dimming	Mounting	Dist Pattern	Rated Life	Legacy Equivalent
KT-FLED140PS-R2B-UNV-8CSB-VDIM KT-FLED140PS-R2B-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W	120-277V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	400W MH
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PS-R2C-UNV-8CSB-VDIM KT-FLED140PS-R2C-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W					6H x 6V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PS-R2D-UNV-8CSB-VDIM KT-FLED140PS-R2D-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W					5H x 5V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PSHV-R2B-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W	277-480V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	400W MH
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PSHV-R2C-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W					6H x 6V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PSHV-R2D-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W					5H x 5V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							

*Note: fixtures with 6H x 6V or 5H x 5V optics are assembled to order. Lead times may apply.

(Product Specifications continue on next page)




KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

PRODUCT SPECIFICATIONS (CONTINUED)

Catalog Number	Selectable Wattage	Selectable CCT	Lumen Output	Efficacy	Input Voltage	CRI	Dimming	Mounting	Dist Pattern	Rated Life	Legacy Equivalent
KT-FLED290PS-R2B-UNV-8CSB-VDIM KT-FLED290PS-R2B-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W	120-277V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	1000W MH
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PS-R2C-UNV-8CSB-VDIM KT-FLED290PS-R2C-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W					6H x 6V		
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PS-R2D-UNV-8CSB-VDIM KT-FLED290PS-R2D-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W				5H x 5V			
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PSHV-R2B-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W	277-480V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	1000W MH
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PSHV-R2C-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W					6H x 6V		
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PSHV-R2D-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W				5H x 5V			
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							

*Note: fixtures with 6H x 6V or 5H x 5V optics are assembled to order. Lead times may apply.




KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X


HIGH POWER FLOODLIGHT

GENERAL WIRING DIAGRAM

120-277V

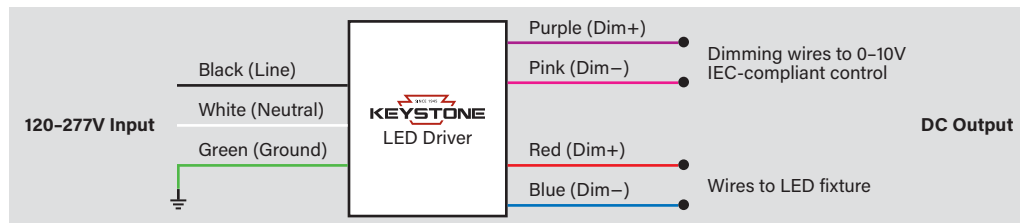


277-480V

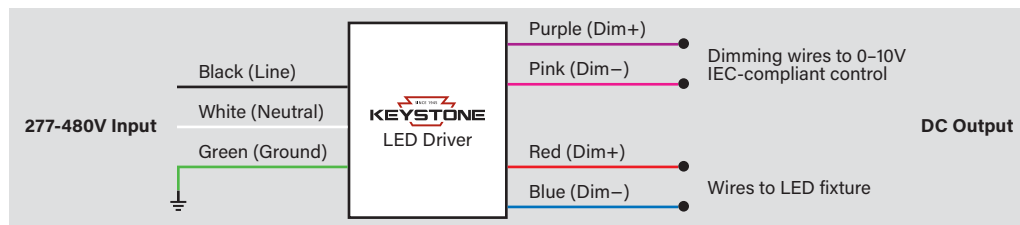


PERFORMANCE SPECIFICATIONS

POWER SELECT (WATTAGE) AND COLOR SELECT (CCT)

1. Ensure power is off to the fixture.
2. Unscrew gasketed cap from the back of the fixture as shown in the image below.
3. Adjust dip switches to desired settings. *Note: all fixtures are factory preset to highest wattage, 5000K.*
4. Screw on gasketed cap.
5. Restore power to fixture.

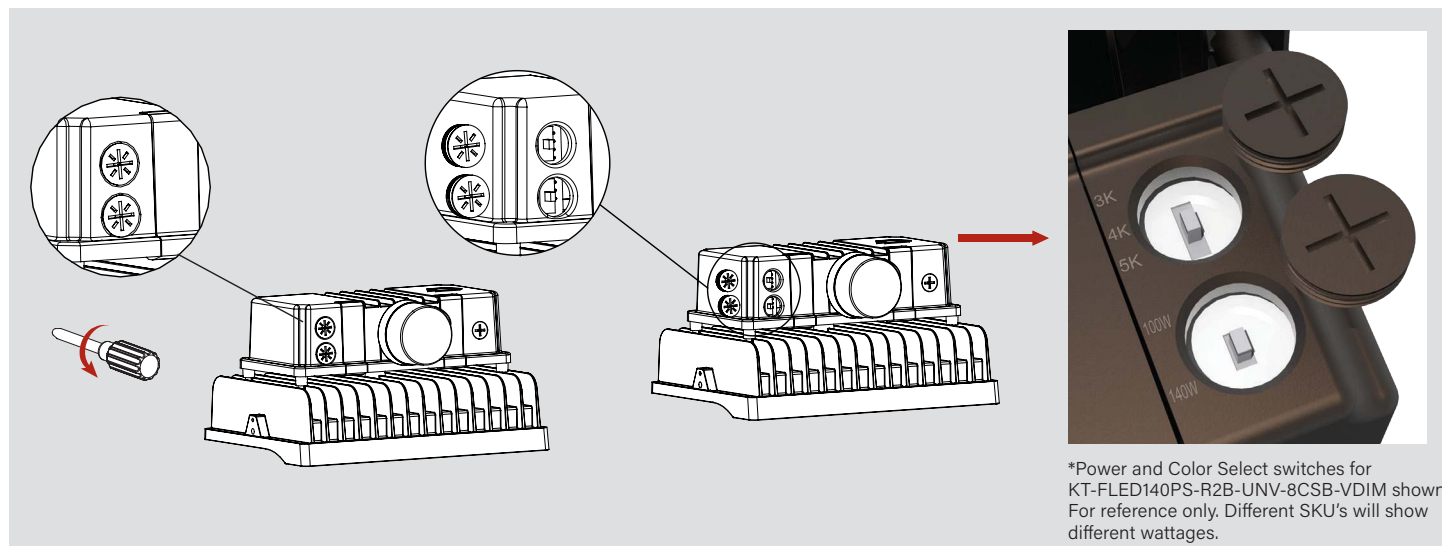





KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

PHOTOMETRICS



KT-FLED290PS-R2B-UNV-8SCB-VDIM-X (7H x 6V)

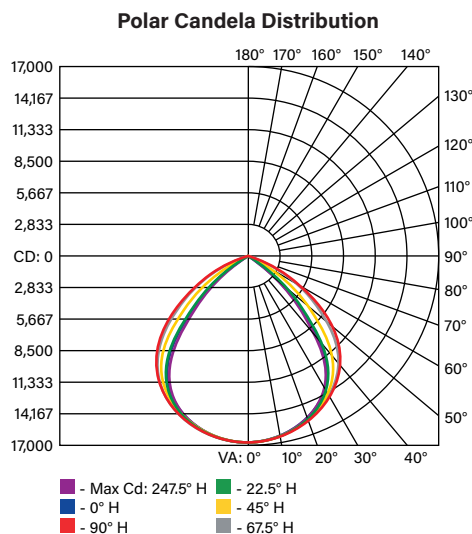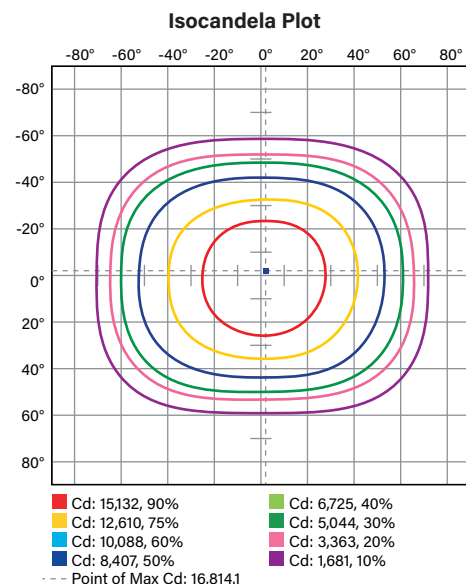

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	6589.6	18.6	18.6
FM (30-60)	9801.3	27.6	27.6
FH (60-80)	1134.7	3.2	3.2
FVH (80-90)	18.7	0.1	0.1
BL (0-30)	6608.5	18.6	18.6
BM (30-60)	10172.9	28.6	28.6
BH (60-80)	1167.3	3.3	3.3
BVH (80-90)	22.4	0.1	0.1
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	35515.4	100.1	100.0
BUG Rating	B5-U0-G3		

KT-FLED290PS-R2C-UNV-8SCB-VDIM-X (6H x 6V)

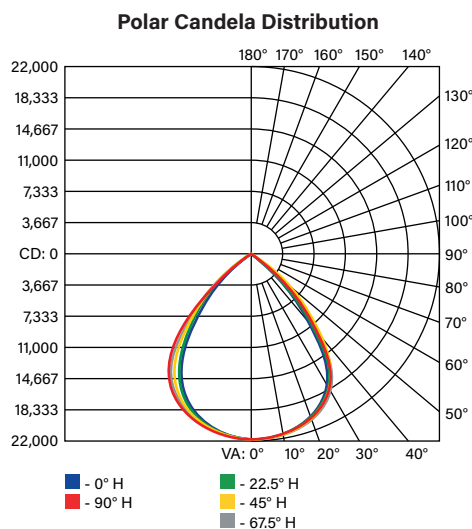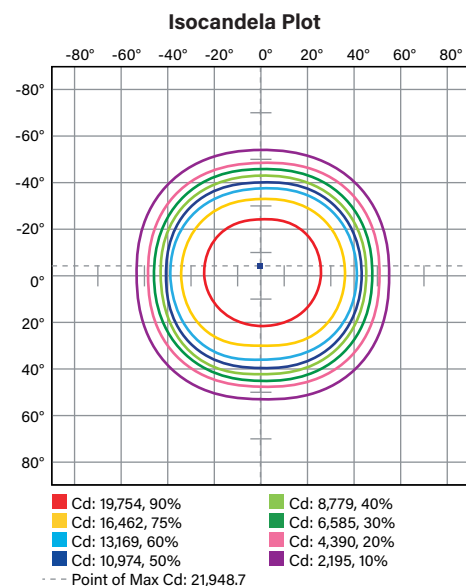

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	8604.2	24.2	24.2
FM (30-60)	9105.2	25.6	25.6
FH (60-80)	470.3	1.3	1.3
FVH (80-90)	11.7	0.0	0.0
BL (0-30)	8404.8	23.7	23.7
BM (30-60)	8444.5	23.8	23.8
BH (60-80)	481.0	1.4	1.4
BVH (80-90)	15.8	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	35537.5	100.0	100.0
BUG Rating	B5-U0-G1		

(Photometrics continue on next page)


KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT


PHOTOMETRICS (CONTINUED)

KT-FLED290PS-R2D-UNV-8SCB-VDIM-X (5H x 5V)

Isocandela Plot

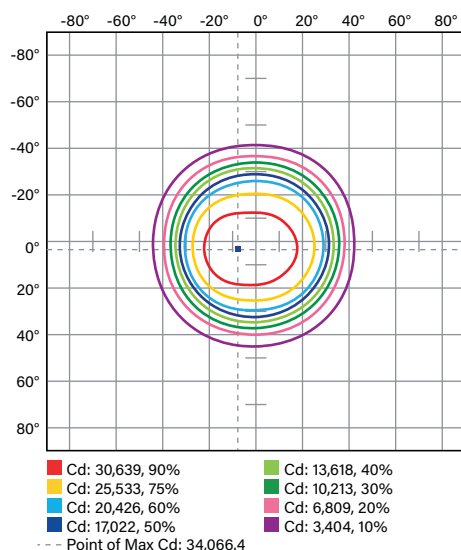

Polar Candela Distribution

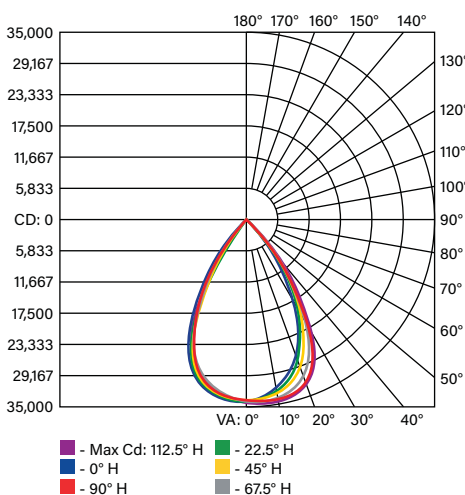


Lum. Classification System (LCS)


LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	11333.1	32.1	32.1
FM (30-60)	5044.0	14.3	14.3
FH (60-80)	506.8	1.4	1.4
FVH (80-90)	10.3	0.0	0.0
BL (0-30)	12141.4	34.4	34.4
BM (30-60)	5781.1	16.4	16.4
BH (60-80)	495.5	1.4	1.4
BVH (80-90)	14.1	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	35326.3	100.0	100.0
BUG Rating	B5-U0-G1		

KT-FLED140PS-R2B-UNV-8CSB-VDIM-X (7H x 6V)

Isocandela Plot

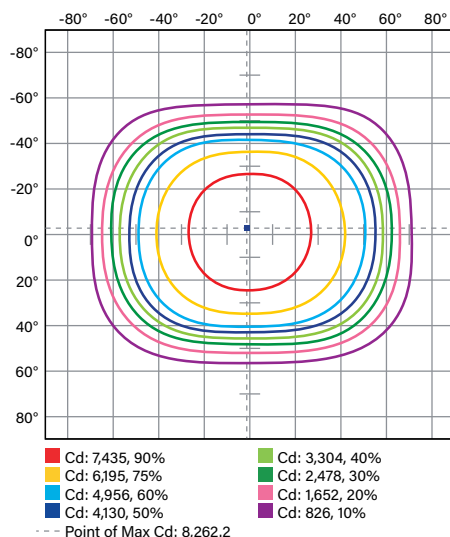


Polar Candela Distribution

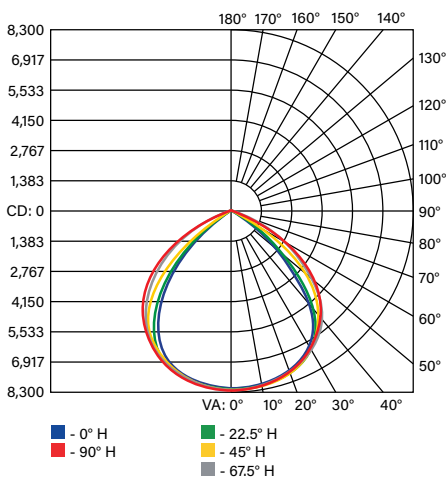

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	3279.7	18.5	18.5
FM (30-60)	5274.8	29.7	29.7
FH (60-80)	557.4	3.1	3.1
FVH (80-90)	7.6	0.0	0.0
BL (0-30)	3229.3	18.2	18.2
BM (30-60)	4900.0	27.6	27.6
BH (60-80)	487.1	2.7	2.7
BVH (80-90)	7.9	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	17743.8	99.8	100.0
BUG Rating	B4-U0-G1		

(Photometrics continue on next page)




KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT


PHOTOMETRICS (CONTINUED)

KT-FLED140PS-R2C-UNV-8CSB-VDIM-X (6H x 6V)

Isocandela Plot

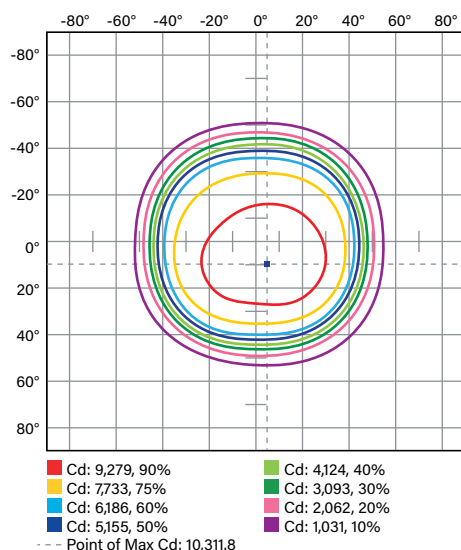

Polar Candela Distribution

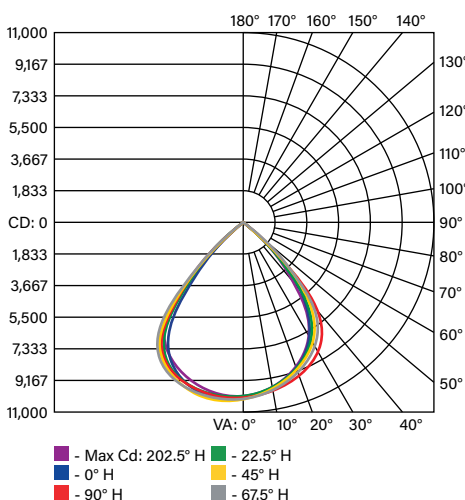


Lum. Classification System (LCS)


LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	3833.9	22.7	22.7
FM (30-60)	3955.9	23.4	23.4
FH (60-80)	197.8	1.2	1.2
FVH (80-90)	4.4	0.0	0.0
BL (0-30)	4113.5	24.4	24.4
BM (30-60)	4533.5	26.8	26.8
BH (60-80)	241.3	1.4	1.4
BVH (80-90)	5.8	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	16886.1	99.9	100.0
BUG Rating	B4-U0-G1		

KT-FLED140PS-R2D-UNV-8CSB-VDIM-X (5H x 5V)

Isocandela Plot

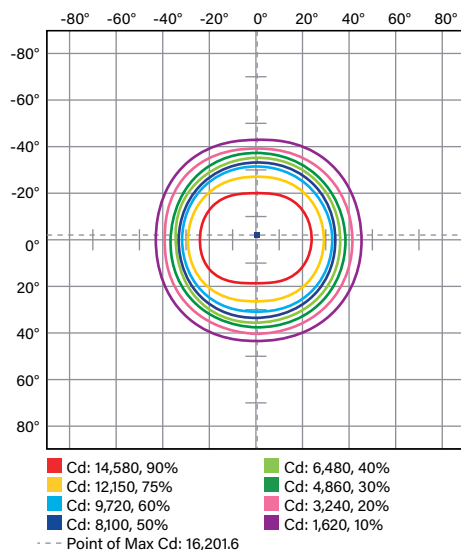

Polar Candela Distribution

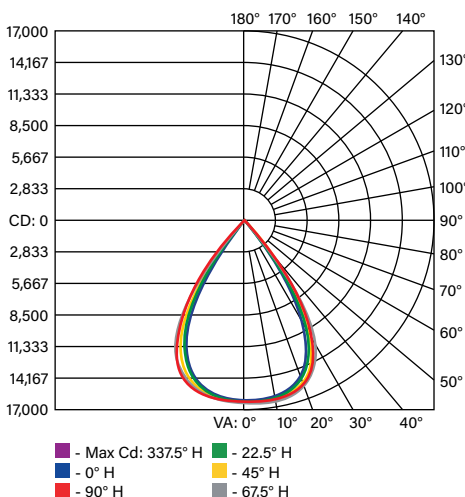

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	6138.9	33.2	33.2
FM (30-60)	3053.7	16.5	16.5
FH (60-80)	169.6	0.9	0.9
FVH (80-90)	1.6	0.0	0.0
BL (0-30)	6022.2	32.6	32.6
BM (30-60)	2912.5	15.8	15.8
BH (60-80)	174.1	0.9	0.9
BVH (80-90)	2.8	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	18475.4	99.9	100.0
BUG Rating	B5-U0-G0		

KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X




HIGH POWER FLOODLIGHT

LIGHT DISTRIBUTION PATTERNS: Isometric View from Above

KT-FLED140PS-R2B-UNV-8CSB-VDIM-X | KT-FLED140PSHV-R2B-UNV-8CSB-VDIM (7H x 6V)

Building exterior mounted at 30' | Aimed 30° below horizontal




Ground mounted 6" above ground, 35' from building | Aimed 10° above horizontal

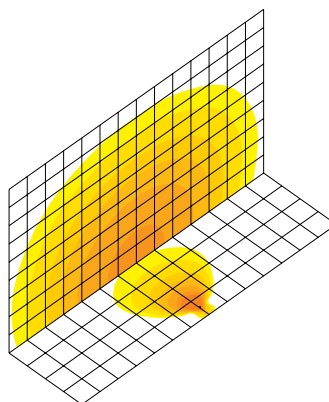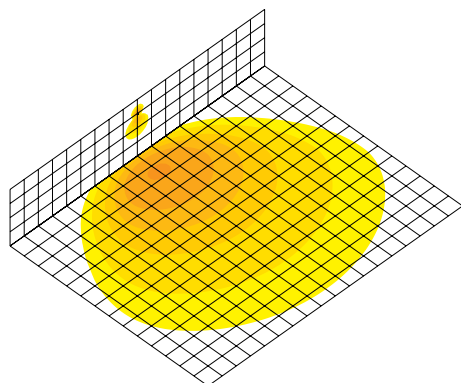

KT-FLED140PS-R2C-UNV-8CSB-VDIM-X | KT-FLED140PSHV-R2C-UNV-8CSB-VDIM (6H x 6V)

Building exterior mounted at 30' | Aimed 30° below horizontal




Ground mounted 6" above ground, 35' from building | Aimed 10° above horizontal

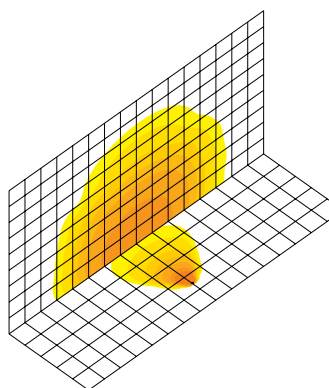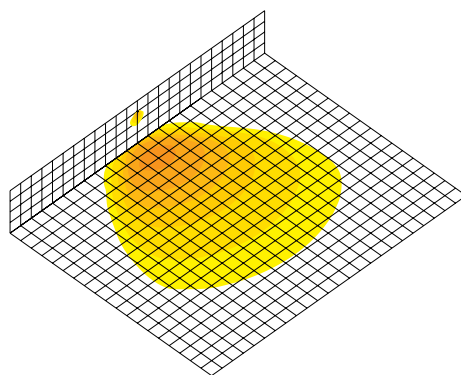

KT-FLED140PS-R2D-UNV-8CSB-VDIM-X | KT-FLED140PSHV-R2D-UNV-8CSB-VDIM (5H x 5V)

Building exterior mounted at 30' | Aimed 30° below horizontal

Ground mounted 6" above ground, 35' from building | Aimed 10° above horizontal

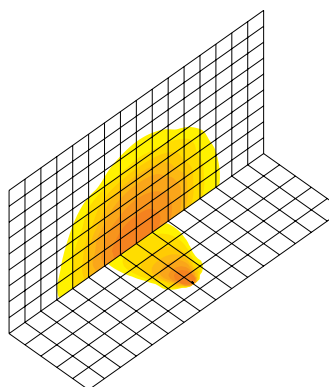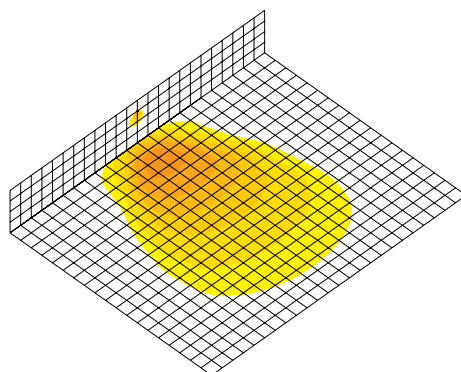

(Light Distribution Patterns continue on next page)

KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X




HIGH POWER FLOODLIGHT

LIGHT DISTRIBUTION PATTERNS: Isometric View from Above (CONTINUED)

KT-FLED290PS-R2B-UNV-8CSB-VDIM-X | KT-FLED290PSHV-R2B-UNV-8CSB-VDIM (7H x 6V)

Building exterior mounted at 35' | Aimed 30° below horizontal




Ground mounted 6" above ground, 40' from building | Aimed 10° above horizontal

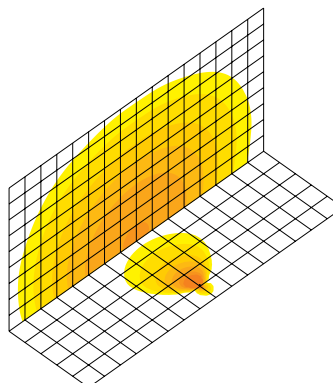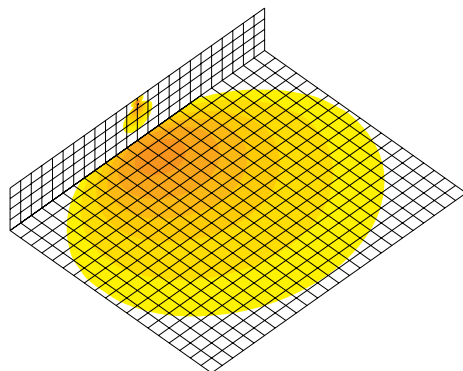

KT-FLED290PS-R2C-UNV-8CSB-VDIM-X | KT-FLED290PSHV-R2C-UNV-8CSB-VDIM (6H x 6V)

Building exterior mounted at 35' | Aimed 30° below horizontal




Ground mounted 6" above ground, 40' from building | Aimed 10° above horizontal

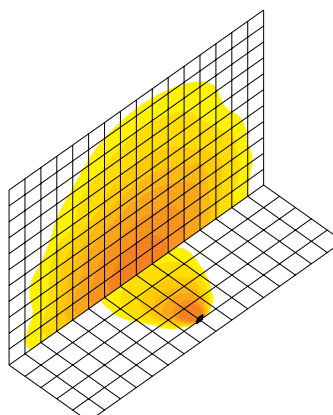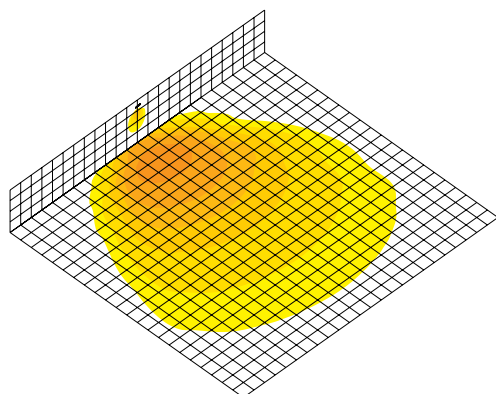

KT-FLED290PS-R2D-UNV-8CSB-VDIM-X | KT-FLED290PSHV-R2D-UNV-8CSB-VDIM (5H x 5V)

Building exterior mounted at 35' | Aimed 30° below horizontal

Ground mounted 6" above ground, 40' from building | Aimed 10° above horizontal

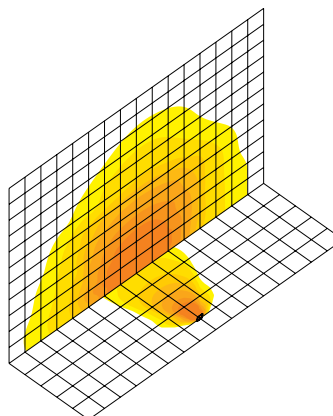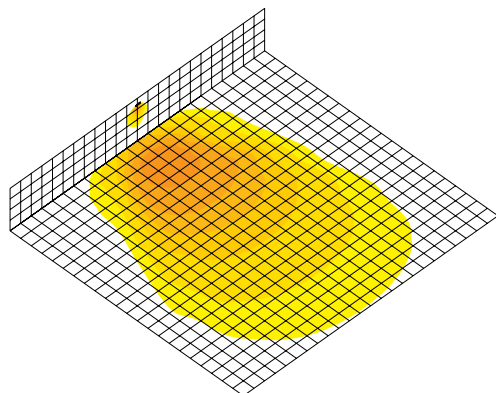


KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X


HIGH POWER FLOODLIGHT

PHYSICAL SPECIFICATIONS

KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-X

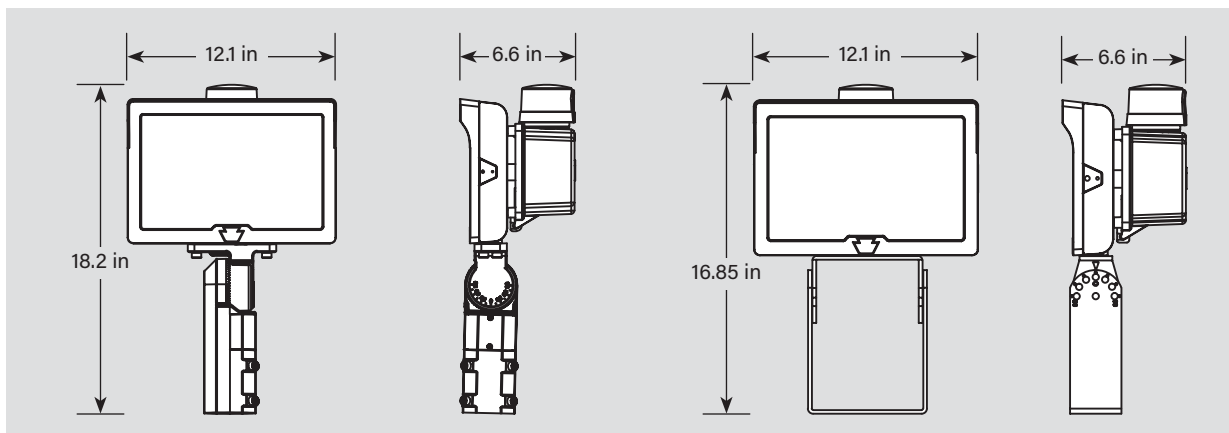


KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-X

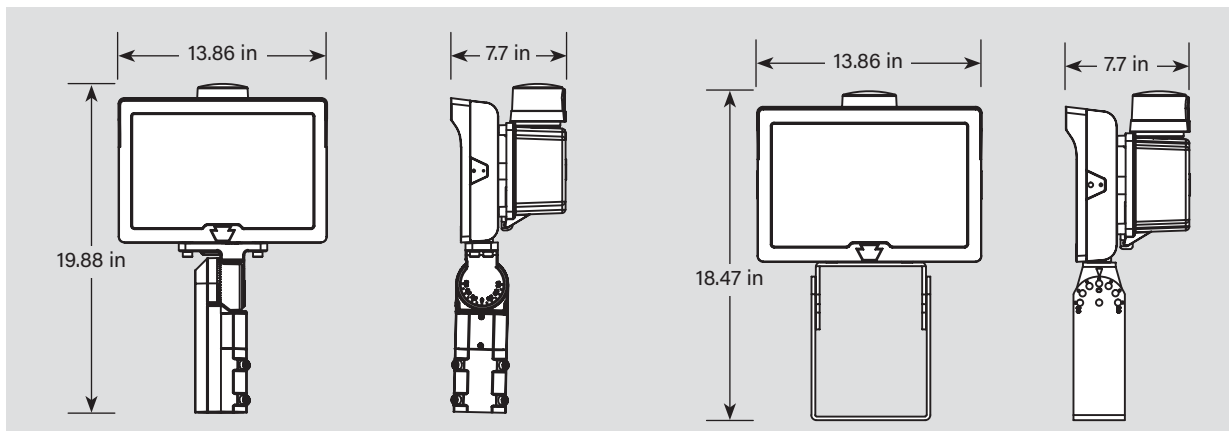

CARTON DIMENSIONS

Wattage	Size	Weight
KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-X	19" x 16.5" x 8.66"	24.03 lbs
KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-X	20.47" x 17.52" x 8.66"	29.76 lbs



KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

ACCESSORIES

Factory-Installable only (for replacement purposes only)

✓	SUFFIX	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	—	KT-RSC-7PN	NEMA 7-pin receptacle and shorting cap	843654135205	BIZ-08



SENSORS

Field-Installable only (for replacement purposes only)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-TLP-UV-3PN	NEMA-Type 3-Pin Twist-lock Photocell 120-277V 1800VA max Blue	843654131825	NQT-46
KT-TLP-HV-3PN	NEMA-Type 3-Pin Twist-lock Photocell 277-480V 1800VA max Yellow	843654131832	CGF-01




GUARDS AND SHIELDS

Field-Installable only (purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-FLED-GS-R2-1-KIT	Glare shield Bronze For use on 140W Series 2 Floodlight	843654138688	UBC-72
KT-FLED-GS-R2-1-KIT-W	Glare shield White For use on 140W Series 2 Floodlight	843654140513	VKD-34
KT-FLED-GS-R2-2-KIT	Glare shield Bronze For use on 290W Series 2 Floodlight	843654138695	VCZ-14
KT-FLED-GS-R2-2-KIT-W	Glare shield White For use on 290W Series 2 Floodlight	843654140520	NZK-92





KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT


ORDERING INFORMATION

Catalog Number	UPC	Easy Code	DLC ID
KT-FLED140PS-R2B-UNV-8CSB-VDIM	843654138626	AME-92	PT0MP5M5
KT-FLED140PS-R2B-UNV-8CSB-VDIM /TAA	843654158693	XDX-75	
KT-FLED140PS-R2C-UNV-8CSB-VDIM	843654145570	BGQ-26	PSFKDM29
KT-FLED140PS-R2D-UNV-8CSB-VDIM	843654145600	PDF-24	PB2GWN9R
KT-FLED140PS-R2B-UNV-8CSB-VDIM-W	843654138633	EDG-69	PT0MP5M5
KT-FLED140PS-R2C-UNV-8CSB-VDIM-W	843654145587	TSO-07	PSFKDM29
KT-FLED140PS-R2D-UNV-8CSB-VDIM-W	843654145617	SDI-41	PB2GWN9R
KT-FLED140PSHV-R2B-UNV-8CSB-VDIM	843654138640	OCZ-04	P4A12DDM
KT-FLED140PSHV-R2C-UNV-8CSB-VDIM	843654145594	GHW-40	P2CU5YUZ
KT-FLED140PSHV-R2D-UNV-8CSB-VDIM	843654145624	EOF-75	P15DFLO7
KT-FLED290PS-R2B-UNV-8CSB-VDIM	843654138657	PFX-43	S-3QJ7MH
KT-FLED290PS-R2B-UNV-8CSB-VDIM /TAA	843654158709	QWH-68	
KT-FLED290PS-R2C-UNV-8CSB-VDIM	843654145631	DJP-06	S-KZMCQ8
KT-FLED290PS-R2D-UNV-8CSB-VDIM	843654145662	SUV-63	S-5X14QJ
KT-FLED290PS-R2B-UNV-8CSB-VDIM-W	843654138664	JNX-01	S-3QJ7MH
KT-FLED290PS-R2C-UNV-8CSB-VDIM-W	843654145648	PAP-59	S-KZMCQ8
KT-FLED290PS-R2D-UNV-8CSB-VDIM-W	843654145679	MTG-98	S-5X14QJ
KT-FLED290PSHV-R2B-UNV-8CSB-VDIM	843654138671	HNG-71	S-YOLFHA
KT-FLED290PSHV-R2B-UNV-8CSB-VDIM /TAA	843654158723	NPP-40	
KT-FLED290PSHV-R2C-UNV-8CSB-VDIM	843654145655	NNB-24	S-6UP2SD
KT-FLED290PSHV-R2D-UNV-8CSB-VDIM	843654145686	HKF-40	S-S2L91M

CATALOG NUMBER BREAKDOWN

KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1 Keystone Technologies	2 Floodlight LED	3 Max Wattage	4 Power Select	5 Input Voltage	6 Shape	7 Style	8 Distribution	9 Mounting	10 UNV	11 Universal	12 Color Select Designation	13 B	14 3000/4000/5000K	15 S-3QJ7MH
5 Input Voltage														
6 Shape														
7 Style														
8 Distribution														
9 Mounting														
10 80 CRI														
11 Color Select														
12 Color Select Designation														
13 0-10V Dimming														
14 Housing Color														
15 TAA Compliant														



KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

DESCRIPTION

High Power Floodlight | Power Select | Color Select | 120-277V or 277-480V Input | 80 CRI | Bronze or White Housing

APPLICATION

Ground, pole, or building mount applications (parking lots, auto dealerships, building facades, signs, recreational venues, general area lighting)



10 YEAR
LIMITED WARRANTY

PRODUCT FEATURES

- Keystone Power Select technology (140/100W or 290/210W)
- Keystone Color Select technology (3000/4000/5000K)
- High power floodlight with innovative design based on established floodlight principles
- Suitable for ground, pole, or building mount applications
- Heavy-duty slipfitter and trunnion mount options included
- 3-pin twist-lock photocell and shorting cap included with NEMA/ANSI C136.10 3-pin twist-lock receptacle
- Precision-crafted optics lens for NEMA 7H x 6V beam spread (installed), 6H x 6V and 5H x 5V also available (sold separately)
- Die-cast aluminum housing, with optional glare shield accessory (sold separately)
- Keystone 0-10V dimming driver with 12V AUX power tap and 6kV surge protection
- Ambient operating temperature: -40°C/-40°F - 50°C/122°F
- UL Certified
- IP65 rated
- Power factor: > 0.95
- THD: < 20%
- L70 @ 100,000 hours @ 25°C/77°F ambient temperature
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

**** TAA options available. See Ordering Information below**

PRODUCT IMAGES



KT-FLED140PSXX-R2X-UNV-8CSB-VDIM
with Slipfitter Mount



KT-FLED140PSXX-R2X-UNV-8CSB-VDIM
with Trunnion Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM
with Slipfitter Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM
with Trunnion Mount



KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-W
with Slipfitter Mount




KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-W
with Trunnion Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-W
with Slipfitter Mount



KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-W
with Trunnion Mount



KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X


HIGH POWER FLOODLIGHT

PRODUCT SPECIFICATIONS

Catalog Number	Selectable Wattage	Selectable CCT	Lumen Output	Efficacy	Input Voltage	CRI	Dimming	Mounting	Dist Pattern	Rated Life	Legacy Equivalent
KT-FLED140PS-R2B-UNV-8CSB-VDIM KT-FLED140PS-R2B-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W	120-277V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	400W MH
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PS-R2C-UNV-8CSB-VDIM KT-FLED140PS-R2C-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W					6H x 6V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PS-R2D-UNV-8CSB-VDIM KT-FLED140PS-R2D-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W					5H x 5V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PSHV-R2B-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W	277-480V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	400W MH
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PSHV-R2C-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W					6H x 6V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							
KT-FLED140PSHV-R2D-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W					5H x 5V		
		4000K	20300	145 lm/W							
		5000K	18900	135 lm/W							
	100W	3000K	13500	135 lm/W							
		4000K	15500	155 lm/W							
		5000K	14500	145 lm/W							

*Note: fixtures with 6H x 6V or 5H x 5V optics are assembled to order. Lead times may apply.

(Product Specifications continue on next page)




KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

PRODUCT SPECIFICATIONS (CONTINUED)

Catalog Number	Selectable Wattage	Selectable CCT	Lumen Output	Efficacy	Input Voltage	CRI	Dimming	Mounting	Dist Pattern	Rated Life	Legacy Equivalent
KT-FLED290PS-R2B-UNV-8CSB-VDIM KT-FLED290PS-R2B-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W	120-277V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	1000W MH
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PS-R2C-UNV-8CSB-VDIM KT-FLED290PS-R2C-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W				Slipfitter installed Trunnion included	6H x 6V		
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PS-R2D-UNV-8CSB-VDIM KT-FLED290PS-R2D-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W				Slipfitter installed Trunnion included	5H x 5V		
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PSHV-R2B-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W	277-480V	>80	0-10V	Slipfitter installed Trunnion included	7H x 6V	50,000 Hours	1000W MH
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PSHV-R2C-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W				Slipfitter installed Trunnion included	6H x 6V		
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							
KT-FLED290PSHV-R2D-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W				Slipfitter installed Trunnion included	5H x 5V		
		4000K	40600	140 lm/W							
		5000K	37700	130 lm/W							
	210W	3000K	27300	130 lm/W							
		4000K	29400	140 lm/W							
		5000K	28350	135 lm/W							

*Note: fixtures with 6H x 6V or 5H x 5V optics are assembled to order. Lead times may apply.




KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X


HIGH POWER FLOODLIGHT

GENERAL WIRING DIAGRAM

120-277V

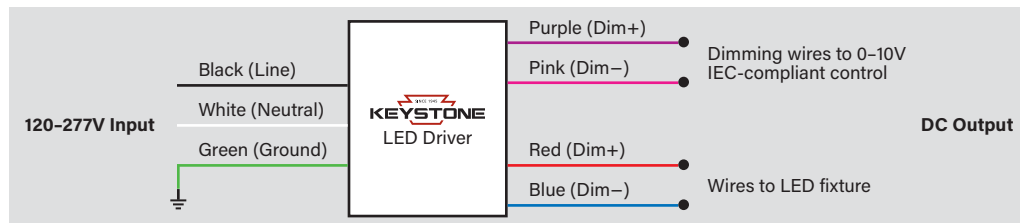


277-480V

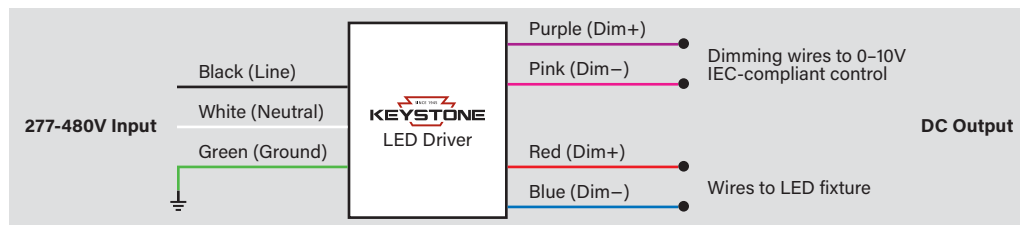


PERFORMANCE SPECIFICATIONS

POWER SELECT (WATTAGE) AND COLOR SELECT (CCT)

1. Ensure power is off to the fixture.
2. Unscrew gasketed cap from the back of the fixture as shown in the image below.
3. Adjust dip switches to desired settings. *Note: all fixtures are factory preset to highest wattage, 5000K.*
4. Screw on gasketed cap.
5. Restore power to fixture.

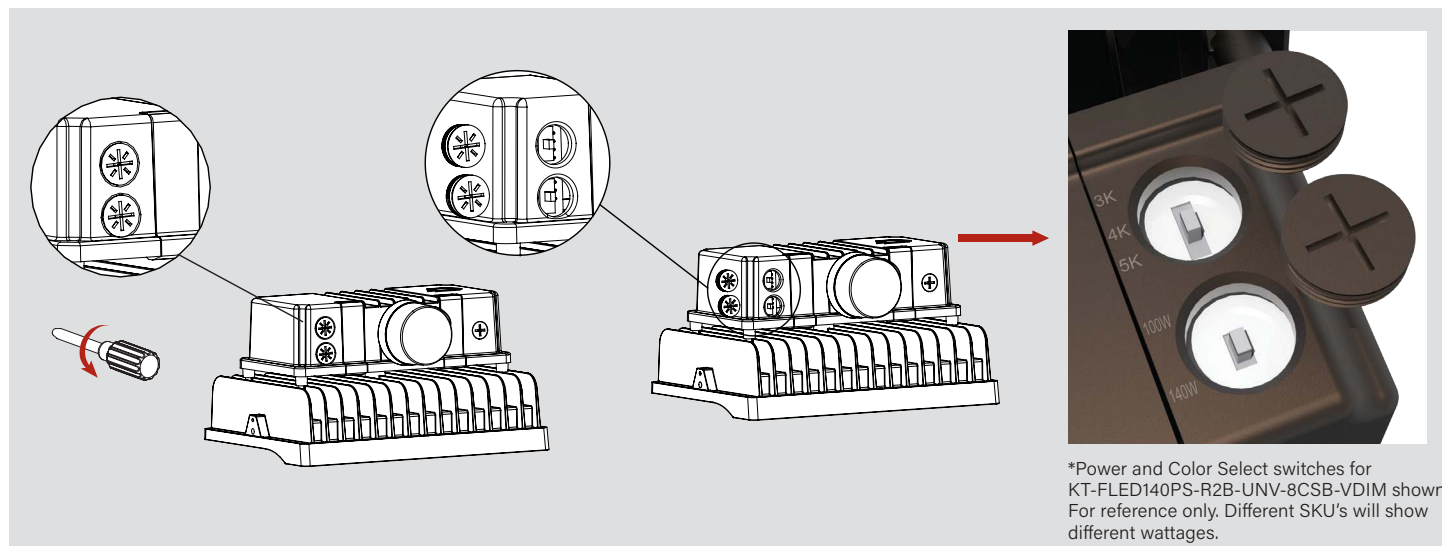





KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

PHOTOMETRICS



KT-FLED290PS-R2B-UNV-8SCB-VDIM-X (7H x 6V)

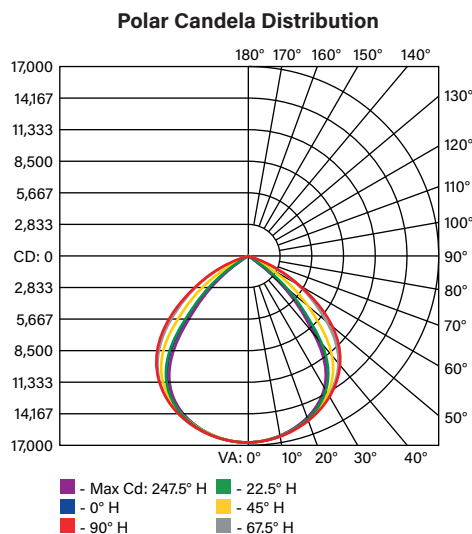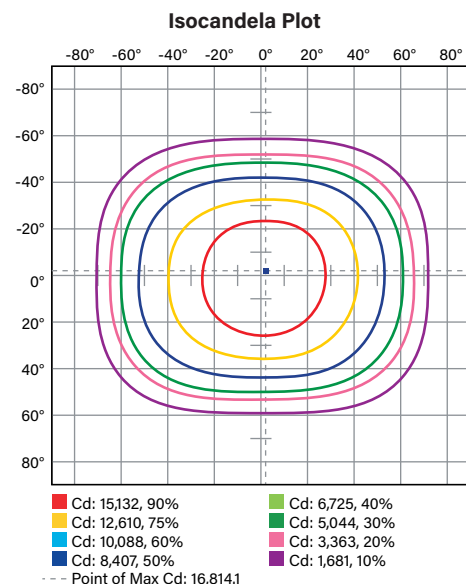

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	6589.6	18.6	18.6
FM (30-60)	9801.3	27.6	27.6
FH (60-80)	1134.7	3.2	3.2
FVH (80-90)	18.7	0.1	0.1
BL (0-30)	6608.5	18.6	18.6
BM (30-60)	10172.9	28.6	28.6
BH (60-80)	1167.3	3.3	3.3
BVH (80-90)	22.4	0.1	0.1
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	35515.4	100.1	100.0
BUG Rating	B5-U0-G3		

KT-FLED290PS-R2C-UNV-8SCB-VDIM-X (6H x 6V)

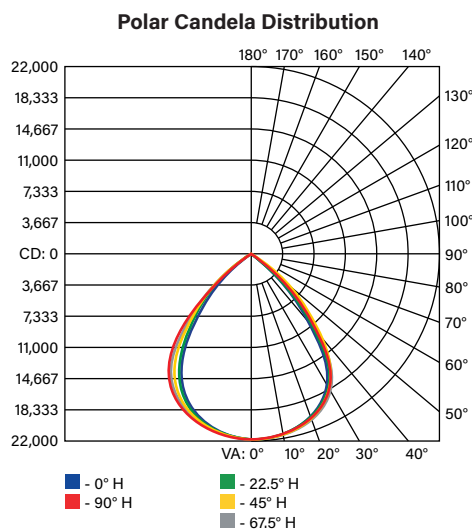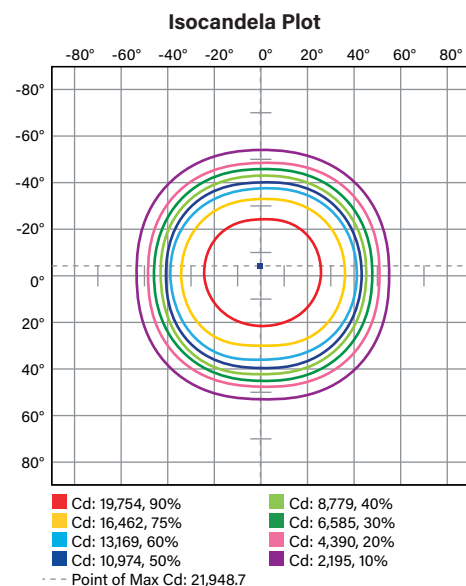

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	8604.2	24.2	24.2
FM (30-60)	9105.2	25.6	25.6
FH (60-80)	470.3	1.3	1.3
FVH (80-90)	11.7	0.0	0.0
BL (0-30)	8404.8	23.7	23.7
BM (30-60)	8444.5	23.8	23.8
BH (60-80)	481.0	1.4	1.4
BVH (80-90)	15.8	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	35537.5	100.0	100.0
BUG Rating	B5-U0-G1		

(Photometrics continue on next page)


KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT


PHOTOMETRICS (CONTINUED)

KT-FLED290PS-R2D-UNV-8SCB-VDIM-X (5H x 5V)

Isocandela Plot

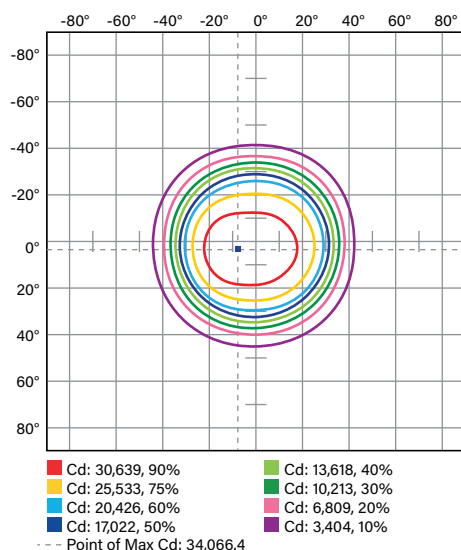

Polar Candela Distribution

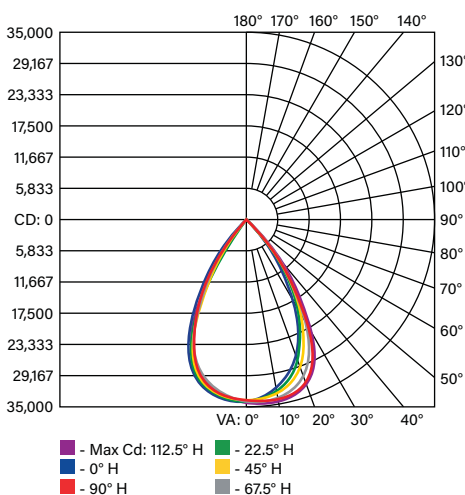


Lum. Classification System (LCS)


LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	11333.1	32.1	32.1
FM (30-60)	5044.0	14.3	14.3
FH (60-80)	506.8	1.4	1.4
FVH (80-90)	10.3	0.0	0.0
BL (0-30)	12141.4	34.4	34.4
BM (30-60)	5781.1	16.4	16.4
BH (60-80)	495.5	1.4	1.4
BVH (80-90)	14.1	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	35326.3	100.0	100.0
BUG Rating	B5-U0-G1		

KT-FLED140PS-R2B-UNV-8CSB-VDIM-X (7H x 6V)

Isocandela Plot

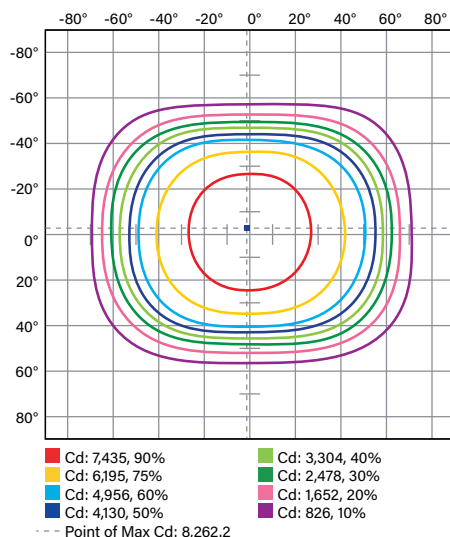


Polar Candela Distribution

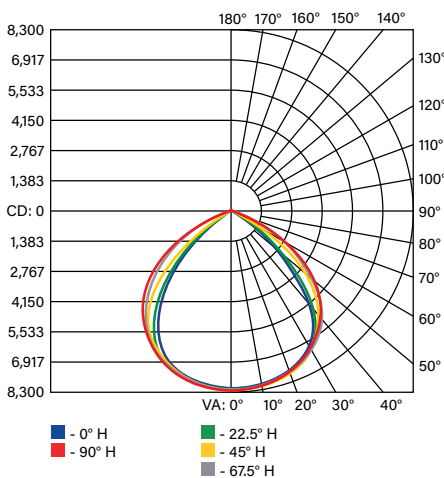

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	3279.7	18.5	18.5
FM (30-60)	5274.8	29.7	29.7
FH (60-80)	557.4	3.1	3.1
FVH (80-90)	7.6	0.0	0.0
BL (0-30)	3229.3	18.2	18.2
BM (30-60)	4900.0	27.6	27.6
BH (60-80)	487.1	2.7	2.7
BVH (80-90)	7.9	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	17743.8	99.8	100.0
BUG Rating	B4-U0-G1		

(Photometrics continue on next page)




KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT


PHOTOMETRICS (CONTINUED)

KT-FLED140PS-R2C-UNV-8CSB-VDIM-X (6H x 6V)

Isocandela Plot

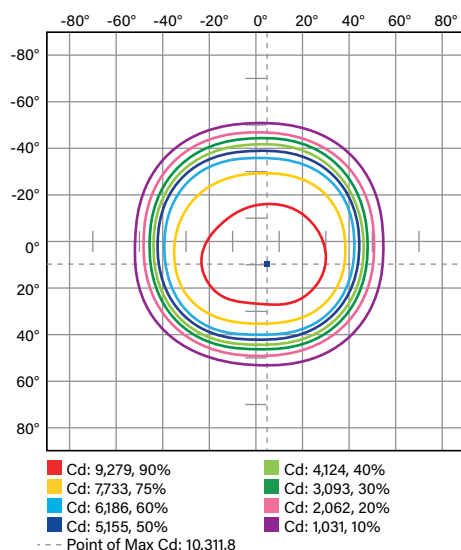

Polar Candela Distribution

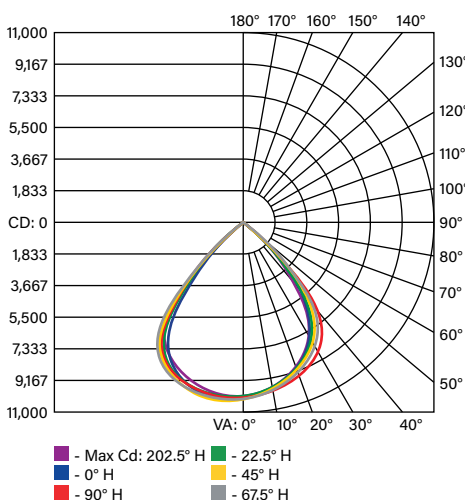


Lum. Classification System (LCS)


LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	3833.9	22.7	22.7
FM (30-60)	3955.9	23.4	23.4
FH (60-80)	197.8	1.2	1.2
FVH (80-90)	4.4	0.0	0.0
BL (0-30)	4113.5	24.4	24.4
BM (30-60)	4533.5	26.8	26.8
BH (60-80)	241.3	1.4	1.4
BVH (80-90)	5.8	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	16886.1	99.9	100.0
BUG Rating	B4-U0-G1		

KT-FLED140PS-R2D-UNV-8CSB-VDIM-X (5H x 5V)

Isocandela Plot

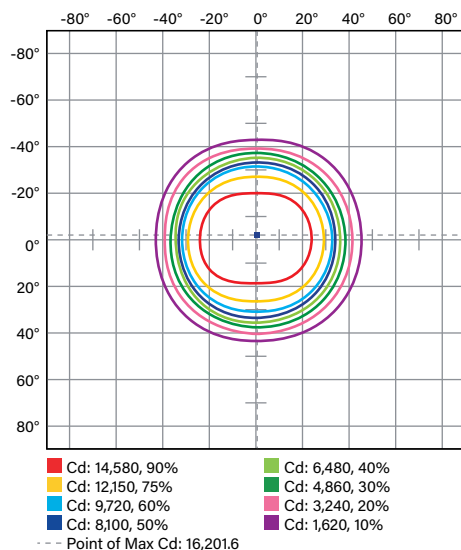

Polar Candela Distribution

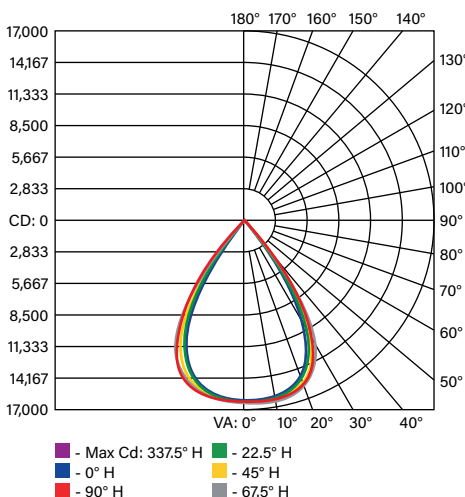

Lum. Classification System (LCS)

LCS Zone	Lumens	% Lamp	% Luminaire
FL (0-30)	6138.9	33.2	33.2
FM (30-60)	3053.7	16.5	16.5
FH (60-80)	169.6	0.9	0.9
FVH (80-90)	1.6	0.0	0.0
BL (0-30)	6022.2	32.6	32.6
BM (30-60)	2912.5	15.8	15.8
BH (60-80)	174.1	0.9	0.9
BVH (80-90)	2.8	0.0	0.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	18475.4	99.9	100.0
BUG Rating	B5-U0-G0		

KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X




HIGH POWER FLOODLIGHT

LIGHT DISTRIBUTION PATTERNS: Isometric View from Above

KT-FLED140PS-R2B-UNV-8CSB-VDIM-X | KT-FLED140PSHV-R2B-UNV-8CSB-VDIM (7H x 6V)

Building exterior mounted at 30' | Aimed 30° below horizontal




Ground mounted 6" above ground, 35' from building | Aimed 10° above horizontal

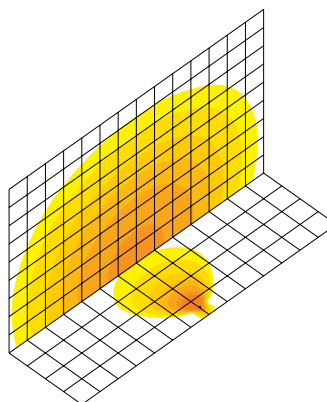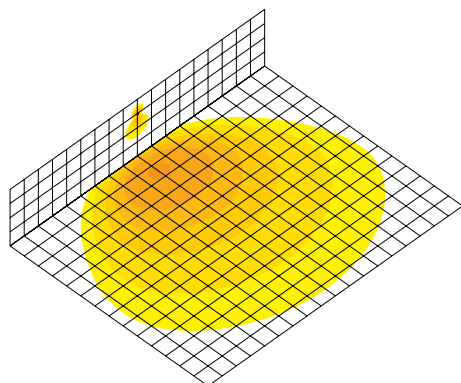

KT-FLED140PS-R2C-UNV-8CSB-VDIM-X | KT-FLED140PSHV-R2C-UNV-8CSB-VDIM (6H x 6V)

Building exterior mounted at 30' | Aimed 30° below horizontal




Ground mounted 6" above ground, 35' from building | Aimed 10° above horizontal

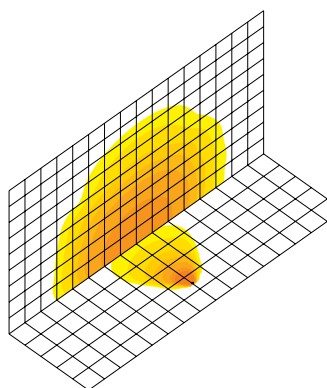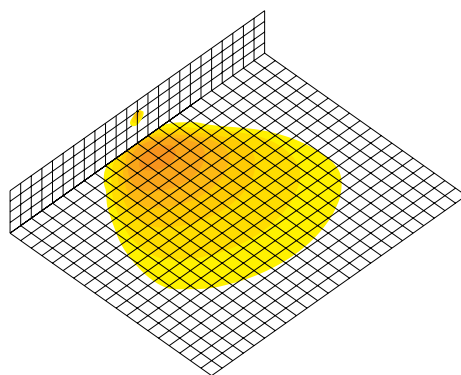

KT-FLED140PS-R2D-UNV-8CSB-VDIM-X | KT-FLED140PSHV-R2D-UNV-8CSB-VDIM (5H x 5V)

Building exterior mounted at 30' | Aimed 30° below horizontal

Ground mounted 6" above ground, 35' from building | Aimed 10° above horizontal

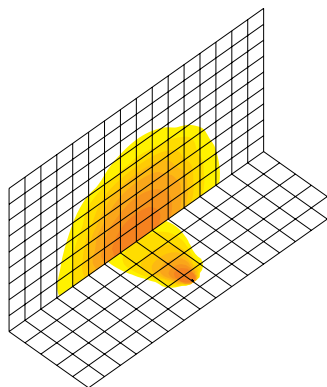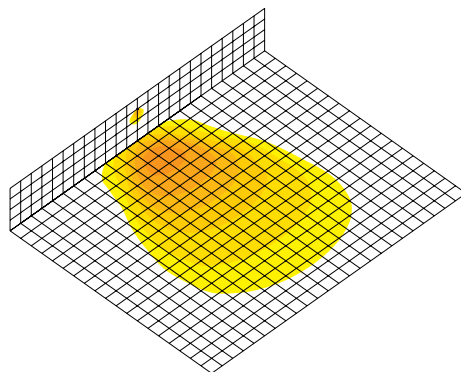

(Light Distribution Patterns continue on next page)

KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X




HIGH POWER FLOODLIGHT

LIGHT DISTRIBUTION PATTERNS: Isometric View from Above (CONTINUED)

KT-FLED290PS-R2B-UNV-8CSB-VDIM-X | KT-FLED290PSHV-R2B-UNV-8CSB-VDIM (7H x 6V)

Building exterior mounted at 35' | Aimed 30° below horizontal




Ground mounted 6" above ground, 40' from building | Aimed 10° above horizontal

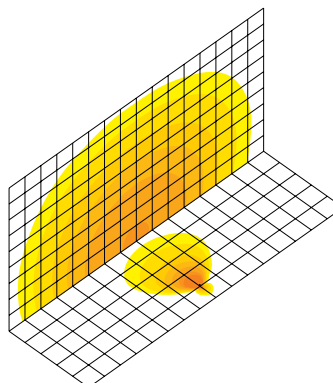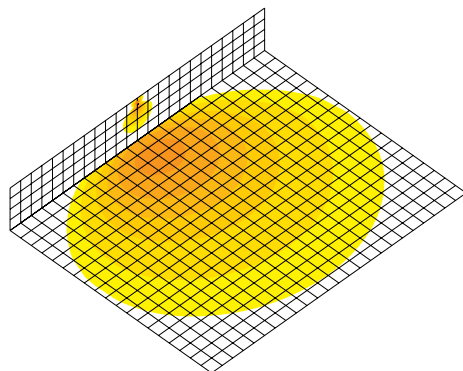

KT-FLED290PS-R2C-UNV-8CSB-VDIM-X | KT-FLED290PSHV-R2C-UNV-8CSB-VDIM (6H x 6V)

Building exterior mounted at 35' | Aimed 30° below horizontal




Ground mounted 6" above ground, 40' from building | Aimed 10° above horizontal

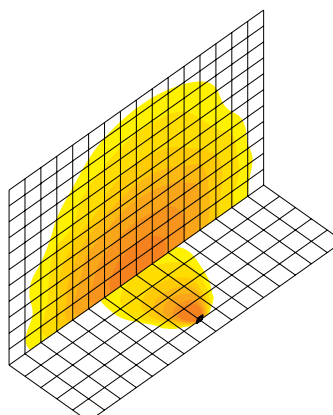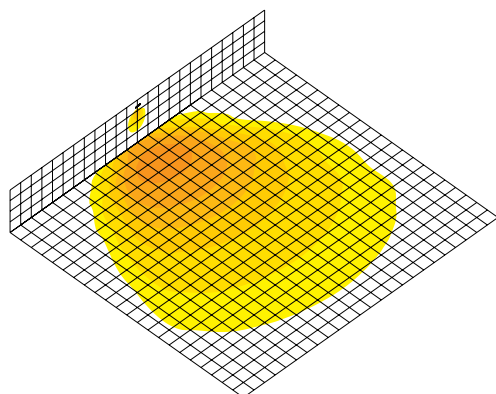

KT-FLED290PS-R2D-UNV-8CSB-VDIM-X | KT-FLED290PSHV-R2D-UNV-8CSB-VDIM (5H x 5V)

Building exterior mounted at 35' | Aimed 30° below horizontal

Ground mounted 6" above ground, 40' from building | Aimed 10° above horizontal

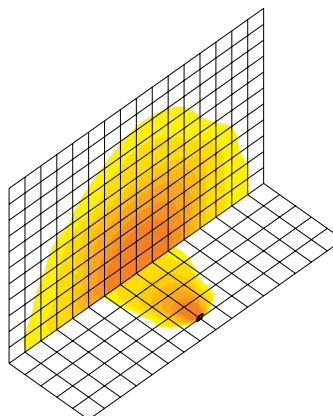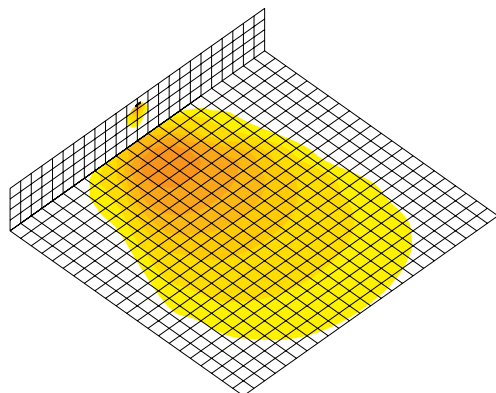


KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X


HIGH POWER FLOODLIGHT

PHYSICAL SPECIFICATIONS

KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-X

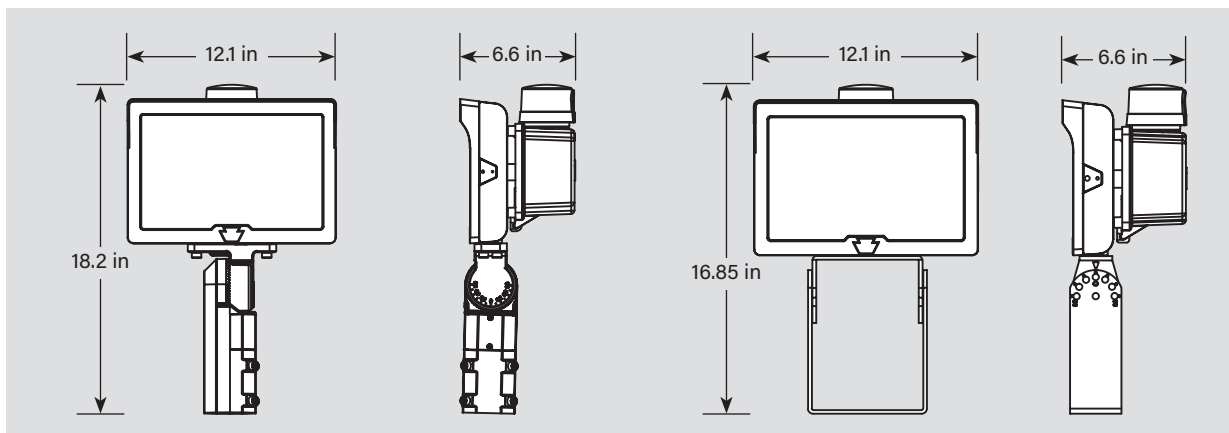


KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-X

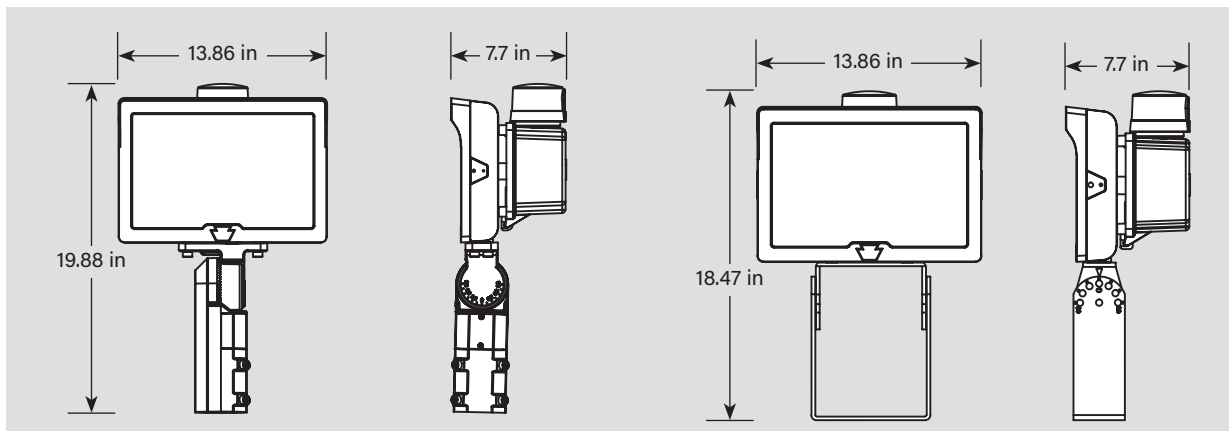

CARTON DIMENSIONS

Wattage	Size	Weight
KT-FLED140PSXX-R2X-UNV-8CSB-VDIM-X	19" x 16.5" x 8.66"	24.03 lbs
KT-FLED290PSXX-R2X-UNV-8CSB-VDIM-X	20.47" x 17.52" x 8.66"	29.76 lbs



KT-FLEDXXXPSXX-R2X-UNV-8CSB-VDIM-X

HIGH POWER FLOODLIGHT

ACCESSORIES

Factory-Installable only (for replacement purposes only)

✓	SUFFIX	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	—	KT-RSC-7PN	NEMA 7-pin receptacle and shorting cap	843654135205	BIZ-08



SENSORS

Field-Installable only (for replacement purposes only)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-TLP-UV-3PN	NEMA-Type 3-Pin Twist-lock Photocell 120-277V 1800VA max Blue	843654131825	NQT-46
KT-TLP-HV-3PN	NEMA-Type 3-Pin Twist-lock Photocell 277-480V 1800VA max Yellow	843654131832	CGF-01



GUARDS AND SHIELDS

Field-Installable only (purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-FLED-GS-R2-1-KIT	Glare shield Bronze For use on 140W Series 2 Floodlight	843654138688	UBC-72
KT-FLED-GS-R2-1-KIT-W	Glare shield White For use on 140W Series 2 Floodlight	843654140513	VKD-34
KT-FLED-GS-R2-2-KIT	Glare shield Bronze For use on 290W Series 2 Floodlight	843654138695	VCZ-14
KT-FLED-GS-R2-2-KIT-W	Glare shield White For use on 290W Series 2 Floodlight	843654140520	NZK-92



