



ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS

KT-LED6A19-O-8XX /G2

REPLACEMENT LAMP

DESCRIPTION

5.7W A19 Lamp | 2700–5000K | > 80 CRI | Omni-Directional



LAMP TYPE: A19
BASE TYPE: E26 (Medium)
WATTAGE: 5.7W
COLOR TEMPERATURE: 2700–5000K
COLOR RENDERING INDEX (CRI): > 80
WARRANTY: 3 Years
RATED LIFE: L70 (15,000 Hours)



TYPICAL APPLICATIONS

- Table, Desk, and Floor Lamps
- Wall Sconces
- Surface Mount Ceiling Fixtures
- General Lighting
- Pendant Lights

PRODUCT FEATURES

- Energy Efficient, 80%+ Energy Savings over Legacy Equivalents
- Lower Heat Generation than Legacy Equivalents
- PF > 0.70
- Complies with Part 15 of FCC
- ANSI compliant construction ensures fitment for intended applications
- Rated for open, recessed, and enclosed fixtures
- Suitable for damp locations
- Operating temperature range –4°F/–20°C to 95°F/35°C
- Long Life minimizes replacement and maintenance costs
- Meets Energy Star requirements
- UL Listed
- Smooth diffused lens for comfortable glare free performance
- Durable Plastic housing lowers the risk for breakage
- Smooth, uniform dimming


ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Description	Color Temp	Input Voltage	Rated Lamp Wattage	Legacy Equivalent Wattage	Base Type	Lumens	CRI	Beam Angle	Dimmable	Efficacy
KT-LED6A19-O-827 /G2	A19 bulb. Omni-Directional, dimmable	2700K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W
KT-LED6A19-O-830 /G2	A19 bulb. Omni-Directional, dimmable	3000K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W
KT-LED6A19-O-840 /G2	A19 bulb. Omni-Directional, dimmable	4000K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W
KT-LED6A19-O-850 /G2	A19 bulb. Omni-Directional, dimmable	5000K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W

KT-LED6A19-O-8XX /G2

REPLACEMENT LAMP

PHYSICAL CHARACTERISTICS

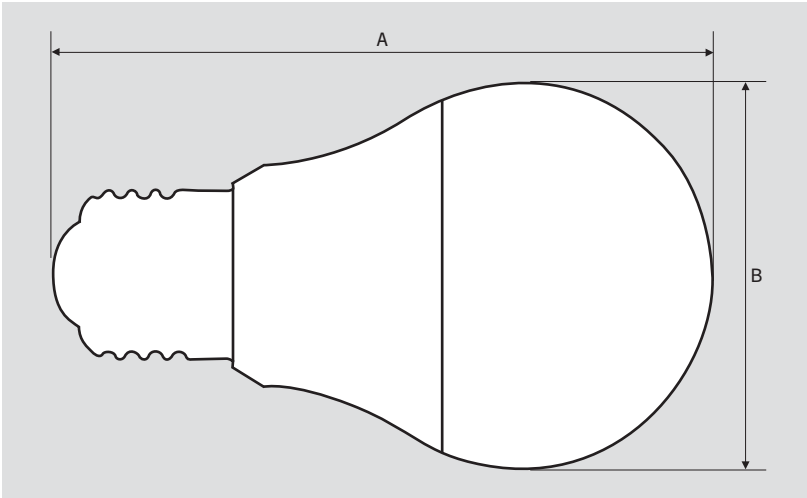

PACKAGING

Carton Quantity	60 pcs
Carton Dimensions	24.61" x 14.76" x 4.72"
Carton Weight	7.74 lbs

LAMP DIMENSIONS

A (Length)	3.94"
B (Diameter)	2.36"

BASE TYPE: E26 (Medium)

ORDERING INFORMATION

CATALOG NUMBER	CARTON QUANTITY	EASY CODE	UPC
KT-LED6A19-O-827 /G2	60 pcs	DOD-54	843654130149
KT-LED6A19-O-830 /G2	60 pcs	KBR-69	843654130156
KT-LED6A19-O-840 /G2	60 pcs	PJC-41	843654137896
KT-LED6A19-O-850 /G2	60 pcs	AKX-31	843654130163

CATALOG NUMBER BREAKDOWN

KT-LED6A19-O-8XX /G2

1 2 3 4 5 6 7 7

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Omni-Directional
- 6 800 Series
- 7 Color Temperature
- 8 Generation 2



ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS

KT-LED6A19-O-8XX /G2

REPLACEMENT LAMP

DESCRIPTION

5.7W A19 Lamp | 2700–5000K | > 80 CRI | Omni-Directional



LAMP TYPE: A19
BASE TYPE: E26 (Medium)
WATTAGE: 5.7W
COLOR TEMPERATURE: 2700–5000K
COLOR RENDERING INDEX (CRI): > 80
WARRANTY: 3 Years
RATED LIFE: L70 (15,000 Hours)



TYPICAL APPLICATIONS

- Table, Desk, and Floor Lamps
- Wall Sconces
- Surface Mount Ceiling Fixtures
- General Lighting
- Pendant Lights

PRODUCT FEATURES

- Energy Efficient, 80%+ Energy Savings over Legacy Equivalents
- Lower Heat Generation than Legacy Equivalents
- PF > 0.70
- Complies with Part 15 of FCC
- ANSI compliant construction ensures fitment for intended applications
- Rated for open, recessed, and enclosed fixtures
- Suitable for damp locations
- Operating temperature range –4°F/–20°C to 95°F/35°C
- Long Life minimizes replacement and maintenance costs
- Meets Energy Star requirements
- UL Listed
- Smooth diffused lens for comfortable glare free performance
- Durable Plastic housing lowers the risk for breakage
- Smooth, uniform dimming


ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Description	Color Temp	Input Voltage	Rated Lamp Wattage	Legacy Equivalent Wattage	Base Type	Lumens	CRI	Beam Angle	Dimmable	Efficacy
KT-LED6A19-O-827 /G2	A19 bulb. Omni-Directional, dimmable	2700K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W
KT-LED6A19-O-830 /G2	A19 bulb. Omni-Directional, dimmable	3000K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W
KT-LED6A19-O-840 /G2	A19 bulb. Omni-Directional, dimmable	4000K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W
KT-LED6A19-O-850 /G2	A19 bulb. Omni-Directional, dimmable	5000K	120V	5.7W	40W	E26	460	> 80	230°	Yes	81 lm/W

KT-LED6A19-O-8XX /G2

REPLACEMENT LAMP

PHYSICAL CHARACTERISTICS

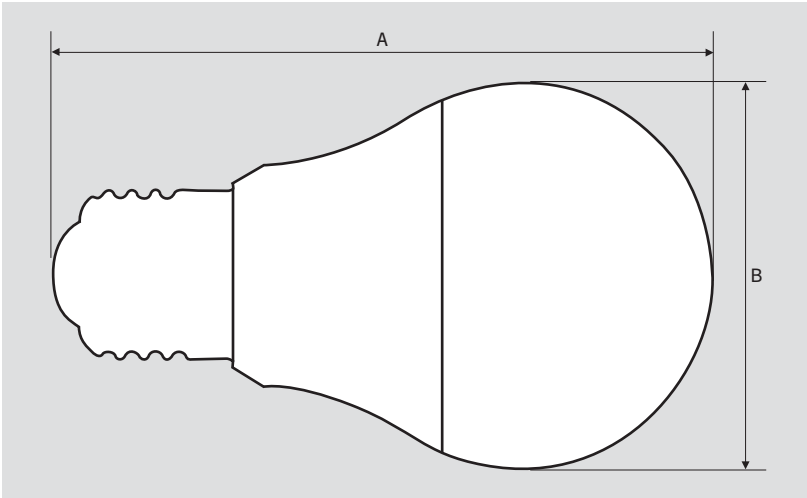

PACKAGING

Carton Quantity	60 pcs
Carton Dimensions	24.61" x 14.76" x 4.72"
Carton Weight	7.74 lbs

LAMP DIMENSIONS

A (Length)	3.94"
B (Diameter)	2.36"

BASE TYPE: E26 (Medium)

ORDERING INFORMATION

CATALOG NUMBER	CARTON QUANTITY	EASY CODE	UPC
KT-LED6A19-O-827 /G2	60 pcs	DOD-54	843654130149
KT-LED6A19-O-830 /G2	60 pcs	KBR-69	843654130156
KT-LED6A19-O-840 /G2	60 pcs	PJC-41	843654137896
KT-LED6A19-O-850 /G2	60 pcs	AKX-31	843654130163

CATALOG NUMBER BREAKDOWN

KT-LED6A19-O-8XX /G2

1 2 3 4 5 6 7 7

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Omni-Directional
- 6 800 Series
- 7 Color Temperature
- 8 Generation 2