



FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting Power Sentry PS1400DW on exterior of a fluorescent fixture. Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3.5 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type

Inverter Accessories

ELA PSMK

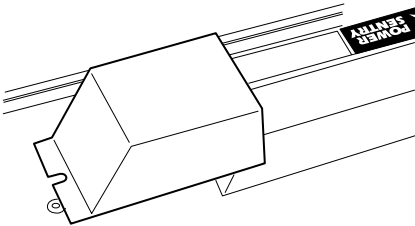

Remote Mounting Kit

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series	
ELA PSMK	Remote mounting kit for PS1400DW; two required

FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting self-diagnostics module (PSSD2) on exterior of a fluorescent fixture.

Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


Dimensions: 3.04" L x 1.22" H x 1.26" W

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Inverter Accessories

ELA PSMKSD

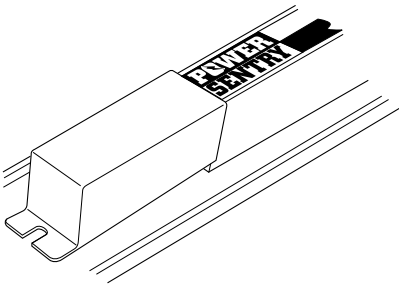

Remote Mounting Kit
for Self-Diagnostics

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series	
ELA PSMKSD	External mounting kit for self-diagnostics module

FEATURES & SPECIFICATIONS

Inverter Accessories


INTENDED USE — Provides simple and fast installation of PSDL3, PS1055LCP, PS1555LCP, PS1055CP FMC, PS1555CP FMC emergency drivers.

CONSTRUCTION — External mounting tray.
Adjustable bar hanging brackets.

WARRANTY — 5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.
Specifications subject to change without notice.

ELA PSDMT

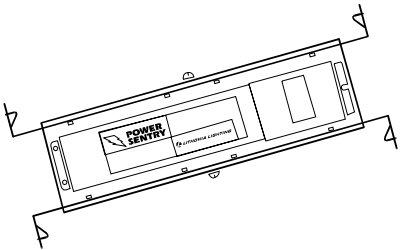

Mounting Tray

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

Series	
ELA PSDMT	External mounting tray

FEATURES & SPECIFICATIONS

Inverter Accessories

INTENDED USE — Provides remote mounting of Power Sentry products in air-rated plenums.
Complies with National Electrical Code Provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 18-gauge steel, post-painted black.
Provides two standard 3/4" conduit knockouts and two 1/2" knockouts for test switch/pilot light mounting.

ELA PSRME Dimensions: 17" L x 3" W x 2" H


ELA PSRME IC Dimensions: 23.57" L x 3.75" W x 3.4" H

ELA PSRME and ELA PSRME IC compatible with PSQ500QD MVOLT, PS600QD MVOLT, PS1400QD MVOLT, PS730, PS750, PS1030 and PS1050, PS1055LCP.

WARRANTY — 5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Actual performance may differ as a result of end-user environment and application.
Specifications subject to change without notice.

ELA PSRME



(ELA PSRME IC)

Remote Mounting Enclosure

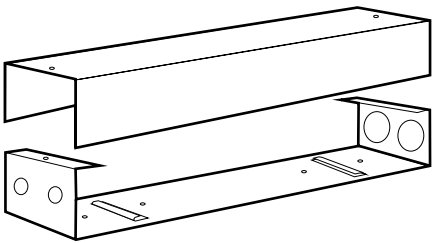

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

Series	
ELA PSRME	Remote mounting enclosure
ELA PSRME IC	Insulated ceiling rated remote mounting enclosure



ELA-PSMK-PSMKSD-PSDMT-PSRME



FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting Power Sentry PS1400DW on exterior of a fluorescent fixture. Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3.5 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type

Inverter Accessories

ELA PSMK

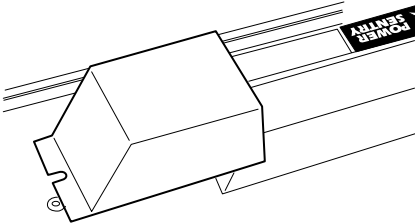

Remote Mounting Kit

ORDERING INFORMATION		Lead times will vary depending on options selected. Consult with your sales representative.
Series		
ELA PSMK	Remote mounting kit for PS1400DW; two required	

FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting self-diagnostics module (PSSD2) on exterior of a fluorescent fixture.

Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


Dimensions: 3.04" L x 1.22" H x 1.26" W

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Inverter Accessories

ELA PSMKSD

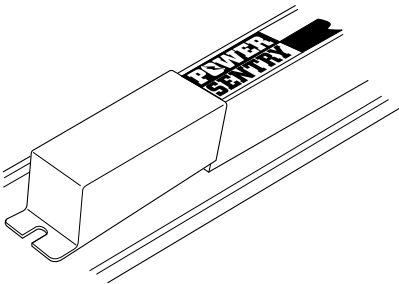

Remote Mounting Kit
for Self-Diagnostics

ORDERING INFORMATION		Lead times will vary depending on options selected. Consult with your sales representative.
Series		
ELA PSMKSD	External mounting kit for self-diagnostics module	

FEATURES & SPECIFICATIONS

Inverter Accessories

INTENDED USE — Provides simple and fast installation of PSDL3, PS1055LCP, PS1555LCP, PS1055CP FMC, PS1555CP FMC emergency drivers.


CONSTRUCTION — External mounting tray.
Adjustable bar hanging brackets.

WARRANTY — 5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.
Specifications subject to change without notice.

ELA PSDMT

Mounting Tray

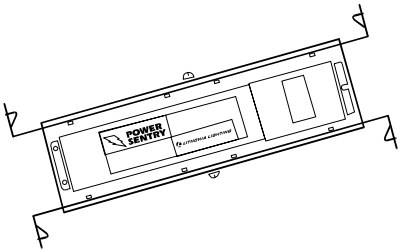

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series	
ELA PSDMT	External mounting tray

FEATURES & SPECIFICATIONS

Inverter Accessories

INTENDED USE — Provides remote mounting of Power Sentry products in air-rated plenums.
Complies with National Electrical Code Provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 18-gauge steel, post-painted black.
Provides two standard 3/4" conduit knockouts and two 1/2" knockouts for test switch/pilot light mounting.

ELA PSRME Dimensions: 17" L x 3" W x 2" H

ELA PSRME IC Dimensions: 23.57" L x 3.75" W x 3.4" H


ELA PSRME and ELA PSRME IC compatible with PSQ500QD MVOLT, PS600QD MVOLT, PS1400QD MVOLT, PS730, PS750, PS1030 and PS1050, PS1055LCP.

WARRANTY — 5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Actual performance may differ as a result of end-user environment and application.
Specifications subject to change without notice.

ELA PSRME

Remote
Mounting
Enclosure

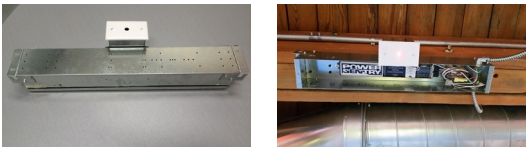

(ELA PSRME IC)

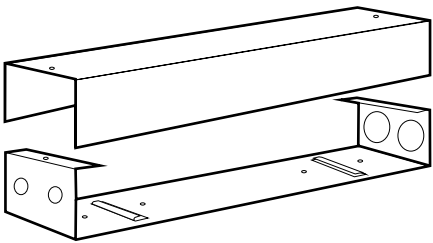

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series	
ELA PSRME	Remote mounting enclosure
ELA PSRME IC	Insulated ceiling rated remote mounting enclosure



ELA-PSMK-PSMKSD-PSDMT-PSRME